


IB IL 24/48 DOR 2/W-PAC

Inline, Relay terminal,
Relay outputs: 2 (floating contacts),
24 V AC / 48 V DC, 2 A

Data sheet
6850_en_03

© PHOENIX CONTACT 2016-09-21

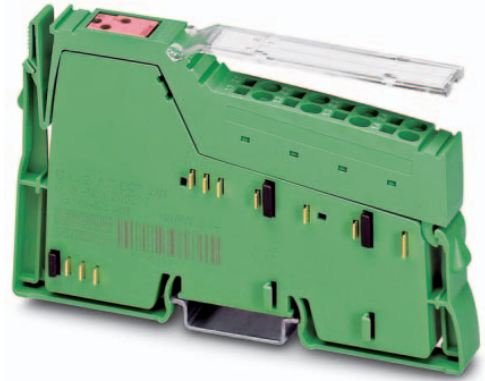

1 Description

The terminal is designed for use within an Inline station.
It has two floating relay PDTs which are independent of each other.

Features

- Two relay outputs
- Floating connections for 2 actuators
- Nominal current of each output: 2 A
- Total current of the terminal: 4 A
- Segment voltage U_S connected
- Diagnostic and status indicators



WARNING: Undefined system state

By default, the position of the relay contacts on the module is not defined. To prevent undesired system states, perform a complete cycle (on/off) before connecting the segment voltage.



This data sheet is only valid in association with the IL SYS INST UM E user manual.



Make sure you always use the latest documentation.
It can be downloaded from the product at phoenixcontact.net/products.


2	Table of contents	
1	Description	1
2	Table of contents	2
3	Ordering data	3
4	Technical data	4
5	Additional tables	7
	5.1 Maximum switching current for ohmic load depending on the switching voltage.....	7
	5.2 Power dissipation	7
	5.3 Limitation of simultaneity, derating	8
	5.4 Air clearances and creepage distances	8
6	Internal circuit diagram	9
7	Special features of the terminal	9
	7.1 Switching a voltage equal to the segment voltage	9
	7.2 Switching a voltage unequal to the segment voltage	9
8	Local status and diagnostic indicators	10
9	Terminal point assignment.....	10
10	Connection notes and examples	11
11	Process data.....	11

3 Ordering data

Description	Type	Order No.	Pcs./Pkt.
Inline, Relay terminal, Relay outputs: 2 (floating contacts), 24 V AC / 48 V DC, 2 A, for switching ohmic loads, Transmission speed in the local bus 500 kBit/s, Degree of protection IP20, including Inline connector and labeling field	IB IL 24/48 DOR 2/W-PAC	2863119	1
Accessories	Type	Order No.	Pcs./Pkt.
Labeling field, width: 12.2 mm (Marking)	IB IL FIELD 2	2727501	10
Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, Plotter: Laser printer, Mounting type: Insert, Lettering field: 62 x 10 mm (Marking)	ESL 62X10	0809492	1
Connector, for digital 1, 2 or 8-channel Inline terminals (Connector/Adapter)	IB IL SCN-8	2726337	10
Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into flat marker groove, for terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm (Marking)	ZBF 6:UNBEDRUCKT	0808710	10
Zack Marker strip, flat, white, for terminal block width: 6.2 mm (Marking)	ZBF 6:SO/CMS	0808778	1
Flat zack marker sheet, white, for terminal block width: 6.2 mm (Marking)	ZBFM 6:SO/CMS	0803650	1
Flat zack marker sheet, Sheet, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into flat marker groove, for terminal block width: 6.2 mm, Lettering field: 5 x 5.5 mm (Marking)	ZBFM 6/WH:UNBEDRUCKT	0803618	10
Inline distance terminal, complete with accessories	IB IL DOR LV-SET-PAC	2861645	1
Documentation	Type	Order No.	Pcs./Pkt.
Application note, English, The safety-related segment circuit	AH EN IL SAFE	-	-
Data sheet, English, INTERBUS addressing	DB GB IBS SYS ADDRESS	-	-
Application note, English, Using distance terminal blocks and interference suppression measures on inductive loads	AH EN IB IL DOR	-	-

4 Technical data

Dimensions (nominal sizes in mm)

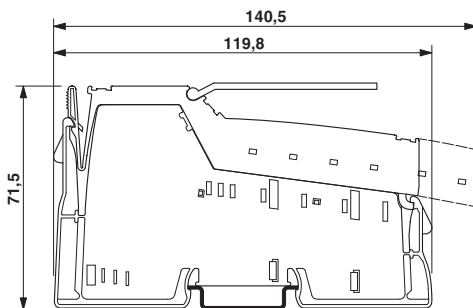

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

General data

Color	green
Weight	63 g (with connector)
Operating mode	Process data mode with 2 bits
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

Connection data

Designation	Inline connector
Connection method	Spring-cage connection
Conductor cross section solid / stranded	0.08 mm ² ... 1.5 mm ² / 0.08 mm ² ... 1.5 mm ²
Conductor cross section [AWG]	28 ... 16
Stripping length	8 mm

Interface Inline local bus

Connection method	Inline data jumper
Transmission speed	500 kBit/s

Power consumption

Communications power U_L	7.5 V DC
Current consumption from U_L	max. 30 mA
Power consumption	0.23 W (at U_L)

Relay outputs

Number of outputs	2 (floating contacts)
Connection method	Spring-cage connection
Nominal output voltage	24 V AC 48 V DC
Output voltage range	5 V AC ... 30 V AC 5 V DC ... 60 V DC
Maximum output current per channel	2 A
Contact type	2 floating PDT contacts
Contact material	AgSnO ₂ , hard gold-plated
Contact resistance	75 mΩ
Switching voltage	min. 10 mV (DC) max. 30 V AC (PELV (EN 61131)) max. 60 V DC (PELV (EN 61131))
Switching current	min. 10 μA 2 A (30 V DC) 1 A (60 V DC)
Limiting continuous current	2 A (at maximum ambient temperature)
Switching capacity	60 W 62 VA (ohmic)
Switching frequency	1 Hz (without load); 1 Hz (with load)
Nominal power consumption	200 mW
Coil resistance	178 Ω ±10 % (at 20 °C)
Typical response time	typ. 20 ms
Bouncing time	4 ms (for on and off)
Typical release time	typ. 20 ms
Service life, electrical	10 ⁸ cycles
Mechanical service life	2x 10 ⁵ cycles
Common potentials	all contacts floating

Programming data (INTERBUS, local bus)

ID code (hex)	BD
ID code (dec.)	189
Length code (hex)	C2
Length code (dec.)	194
Process data channel	2 Bit
Input address area	0 Bit
Output address area	2 Bit

Programming data (INTERBUS, local bus)

Parameter channel (PCP)	0 Bit
Register length (bus)	2 Bit



For the programming data/configuration data of other bus systems, please refer to the corresponding electronic device data sheet (e.g., GSD, EDS).

Configuration and parameter data in a PROFIBUS system

Required parameter data	3 Byte
Need for configuration data	4 Byte

Error messages to the higher level control or computer system

None

Electrical isolation/isolation of the voltage areas

Test section	Test voltage
Relay contact / Bus logics	1.5 kV, 50 Hz, 1 min.
Contact/contact	1 kV, 50 Hz, 1 min.
Contact / PE	1 kV, 50 Hz, 1 min.



To achieve electrical isolation between the logic level and the I/O area, supply these areas from separate power supply units. Interconnection of the power supply units in the 24 V area is not permitted (see IL SYS INST UM E user manual).

Approvals

For the latest approvals, please visit phoenixcontact.net/products.

5 Additional tables

5.1 Maximum switching current for ohmic load depending on the switching voltage

Switching voltage (V DC)	Switching current (A)
10	2.0
20	2.0
30	2.0
60	1.0

Load current I_L as a function of the switching voltage U_S

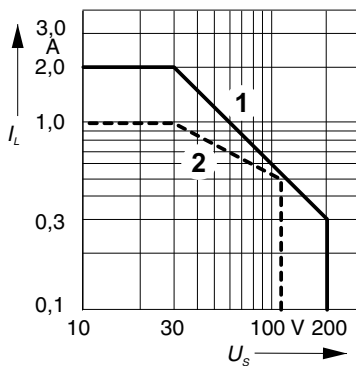


Figure 1 Load current I_L as a function of the switching voltage U_S

- 1 DC, ohmic load
- 2 AC, ohmic load

Number of operations N as a function of the load current I_L

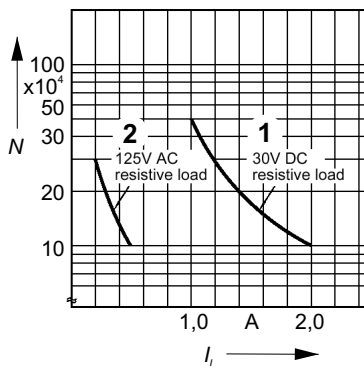


Figure 2 Number of operations N as a function of the load current I_L

- 1 30 V DC, ohmic load
- 2 125 V AC, ohmic load

5.2 Power dissipation

Formula for calculating the power dissipation of the electronics

$$P_{EL} = 0,23 \text{ W} + m \times 0,14 \text{ W} + \sum_{i=1}^n (I_{Li}^2 \times 0,075)$$

Where:

- P_{EL} Total power dissipation in the terminal
- i Continuous index
- n Number of set outputs ($n = 1 \dots 2$)
- m Number of relays with controlled coil
- I_{Li} Load current of output i

Power dissipation of the housing

$$P_{HOU} = 1.2 \text{ W} \quad -25^\circ\text{C} \leq T_A < +25^\circ\text{C}$$

$$P_{HOU} = 1.2 \text{ W} - [(T_A - 25^\circ\text{C}) \times 0.02 \text{ W}/^\circ\text{C}] \quad +25^\circ\text{C} < T_A \leq +55^\circ\text{C}$$

Where:

- P_{HOU} Power dissipation of the housing
- T_A Ambient temperature


5.3 Limitation of simultaneity, derating

Derating when using the N/O contact			
Ambient temperature T_{amb}	Power dissipation of the housing	Maximum load current	
		100 % simultaneity	50 % simultaneity
$\leq 40^{\circ}\text{C}$	0.9 W	2.0 A	2.0 A
$\leq 55^{\circ}\text{C}$	0.6 W	1.0 A	2.0 A

5.4 Air clearances and creepage distances

Air clearances and creepage distances (according to EN 50178, VDE 0109, VDE 0110)			
Isolating distance	Clearance	Creepage distance	Test voltage
Relay contact/bus logic	$\geq 1.5 \text{ mm}$	$\geq 1.5 \text{ mm}$	1.5 kV, 50 Hz, 1 min.
Contact/contact	$\geq 1.5 \text{ mm}$	$\geq 1.5 \text{ mm}$	1.0 kV, 50 Hz, 1 min.
Contact/PE	$\geq 3.1 \text{ mm}$	$\geq 3.1 \text{ mm}$	1.5 kV, 50 Hz, 1 min.
Relay/relay	None		

6 Internal circuit diagram

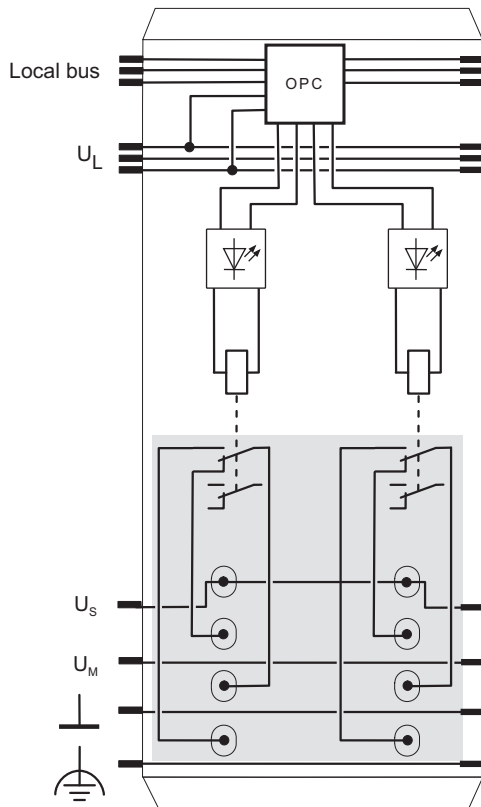

68501003

Figure 3 Internal wiring of the terminal points


Key:



Protocol chip
(Bus logic including voltage conditioning)



LED



Relay



Electrically isolated area
I/O area including relay contact isolated from
the logic area including the relay coil



Explanation for other used symbols has been
provided in the IL SYS INST UM E user
manual.

7 Special features of the terminal



See also the information in the
AH EN IB IL DOR application note.

7.1 Switching a voltage equal to the segment voltage

The potential U_S is available at terminal points 1.1 and 1.2. If you insert a jumper between 1.1 and 1.3 or 2.1 and 2.3, you connect the segment voltage potential to the main contact of the relevant relay and can therefore switch the connected load in a **non-isolated** manner.

If you do not insert a jumper, you can switch the load in a **floating** manner.

7.2 Switching a voltage unequal to the segment voltage

Different DC voltages

Distance terminals are not required.

Only **floating** switching of the load is permitted. Do not, therefore, attach any jumpers to the connector.



If the switch contact potentials and the segment circuit potential are two different DC circuits, Phoenix Contact recommends establishing a ground connection between the two power supply units.

Switching an AC voltage within a DC segment circuit

Place distance terminals in front of and behind the relay terminal block.

The distance terminals interrupt the potential jumpers. As a result, no segment voltage is present at terminal points 1.1 and 2.1. It is only possible to switch the connected load in a **floating** manner.



Use Inline terminals IB IL 24/230 DOR1W-PAC or IB IL 24/230 DOR4/W-PAC for switching voltages outside of the PELV.

8 Local status and diagnostic indicators




Figure 4 Local diagnostic and status indicators

Designation	Color	Meaning
D	Green	Diagnostics (bus and logic voltage)
1 ... 2	Yellow	Status of the outputs (relay has picked up)

Function identification

Pink

Housing/connector color

Green housing

Green, unprinted connector

9 Terminal point assignment

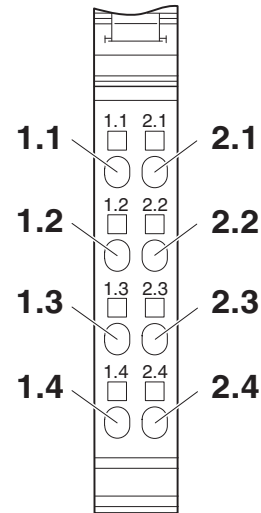


Figure 5 Terminal point assignment

Terminal point	Assignment	
1.1 / 2.1	Segment voltage U_S	
1.2	Relay N/C contact	Relay 1
1.3	Relay main contact	Relay 1
1.4	Relay N/O contact	Relay 1
2.2	Relay N/C contact	Relay 2
2.3	Relay main contact	Relay 2
2.4	Relay N/O contact	Relay 2

10 Connection notes and examples



NOTE: Damage to the electronics
 Use the terminal within the PELV range (EN 61131) up to a maximum of 30 V AC or 60 V DC.

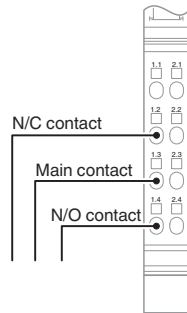


Figure 6 Actuator connection; floating connection




Figure 7 Actuator connection; non-isolated connection

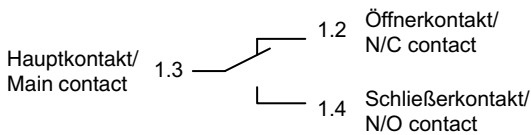


Figure 8 Output relay contacts

11 Process data

Assignment of the terminal points to the output process data

(Byte.Bit) view	0.1	0.0	N/O contact 2 (contact 2.4)	N/O contact 1 (contact 1.4)
Possible bit combinations	0	0	open	open
	0	1	open	closed
	1	0	closed	open
	1	1	closed	closed
Status indicator	LED		2	1

The LED lights up if the corresponding N/O contact is closed.



For the assignment of the illustrated (byte.bit) view to your INTERBUS control or computer system, please refer to the DB GB IBS SYS ADDRESS data sheet.