
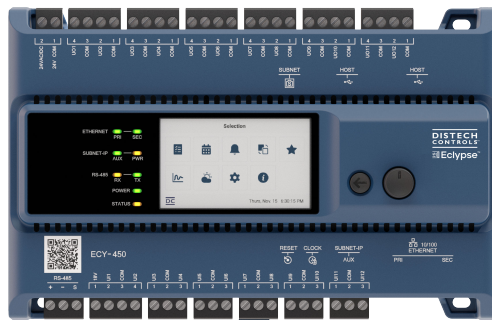


# ECY-600 Series

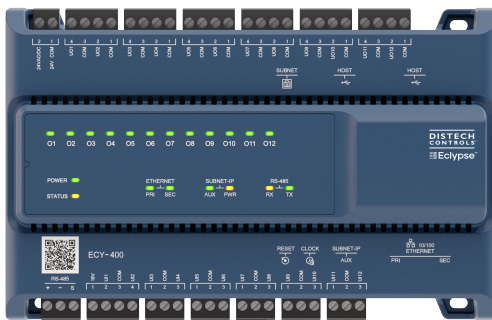

## Overview

The Eclipse™ 600 (ECY-600) Series controllers are designed to control various building automation applications such as air handling units, chillers, boilers, pumps, cooling towers, and central plant applications. They support BACnet/IP communications and are listed BACnet Building Controllers (B-BC). This series supports the use of the ECY-COM modules as well as two additional ECY-IOM extension modules.

These programmable controllers are powered by Eclipse Facilities and include two years of Atrius Facilities - Organize. They feature an embedded visualization interface and web server, which enables web-based application configuration, scheduling, alarming, and logging. Control logic and graphic user interface can be customized as required for the application.

## Features & Benefits

- Eclipse Series input/output and communication modules are supported, providing competitive I/O combinations, and supporting up to 62 I/O points (up to 1 communication module and 2 I/O modules).
- More compact architecture and flexible installation. Can be mounted vertically or horizontally; perfect for panel retrofits or applications when limited horizontal space is available
- An optional full-color backlit display with jog dial provides direct access to a wide range of controller functions
- Flexible networking using options for isolated applications and fail-safe daisy-chaining applications. Two Ethernet ports and an AUX port can be configured to create separate networks.
- Software-configurable IOs reduce controller manipulation.
- Different communication protocols such as BACnet MS/TP, BACnet/SC, BACnet/IP, MQTT, Modbus RTU, Modbus TCP, and M-Bus are supported to ensure ease of communication, authentication, and error detection.
- Connectivity packs enable remote devices to be added to a connector in Eclipse Facilities. The connectivity packs along with optional I/O and expansion modules provide ultimate flexibility and expandability to customize your project needs.
- Readily supports Atrius Facilities that simplifies installation and maintenance of systems and increases the efficiency of building operations.

# Model & Connectivity Selection

## Model Selection

Example: ECY-**600-C25**

Series	Model	Connectivity
ECY-	<b>600</b> : 30-Points, 24VAC/DC Power Supply, 16 UI, 14 UO	- <b>C0</b> : default model if no connectivity is required
	<b>650</b> : 30-Points, 24VAC/DC Power Supply, 16 UI, 14 UO, Color display	- <b>C1 .... C50</b> : if connectivity is required (see table below)

## Connectivity Packs

Connectivity packs enable remote devices to be added to a connector in Eclipse Facilities. A single pack adds x connections and x \* 100 points of connectivity.

BACnet Network Values in EC-*gfx*Program are available without connectivity packs.

Connectivity		Device Ratios			
		1:1	2:1	8:1	100:1
Connectivity Pack	Connections (device loads)	BACnet Devices (IP or MS/TP)	Modbus devices (TCP/IP or RTU)	M-Bus devices <sup>1</sup>	Global point count
C1 <sup>2</sup>	1	1	2	8	100
C3	3	3	6	24	300
C5	5	5	10	40	500
C10	10	10	20	60	1000
C25	25	25	50	60	2500
C50	50	50	100 <sup>3</sup>	60	5000

<sup>1</sup>The maximum number of physical M-Bus meters is 3 when the ECY-MBUS module is connected to the controller's USB port. The limit is 60 physical M-Bus meters when the module is connected to the HD15 port.

<sup>2</sup>Minimum Connectivity Pack required to enable BACnet routing, MS/TP "Client", integration, use of RS485 port

<sup>3</sup>Modbus RTU limited to 32 devices/RS-485 port, 96 devices total

Depending on the connector, a device can consume a whole connection or a fraction of a connection.

The device ratios are the following using a C5 connectivity pack (refer to table above):

- BACnet (1:1) = 5 BACnet with C5
- Modbus (2:1) = 10 Modbus with C5
- M-Bus<sup>1</sup> (8:1) = 40 M-Bus with C5

## How to calculate connectivity

Connectivity packs are cumulative but only one pack can be ordered with a controller. More packs can be added afterwards in the field. The following shows how to calculate the connectivity needed:

$$6 \text{ BACnet} + (3 \text{ Modbus} \div 2) + (6 \text{ M-bus} \div 8) = 8.25$$

Select C10 (10 connections, 1000 points)

To assist in calculating the required connectivity, contact your RSM for more details or refer to the price list if available.

## Accessories

Eclipse Wi-Fi Adapter	Wi-Fi Adapter for Eclipse Connected Controllers.
-----------------------	--

<sup>1</sup>Some physical M-Bus meters can include more than 1 virtual M-Bus device. Since each virtual M-Bus device has its own M-Bus address on the M-Bus network, the Connectivity Pack will count the number of virtual devices, rather than the number of physical M-Bus meters. It is therefore recommended to check whether the M-Bus meters that will be connected to the controller include virtual M-Bus devices, and, if so, how many, before choosing a Connectivity Pack license.

Eclipse Open-To-Wireless™ Adapter	EnOcean communication protocol adapter for Eclipse Connected Controllers.
Eclipse HD15 Cable	6ft (1.8m) cable for multiple-row panel installations. An HD15 cable must always be followed by a power supply module. For more information, refer to the Hardware Installation Guide.
ECx-Subnet-Adapter	Required for daisy-chaining the ECx-Display or the EC-Multi-Sensor with other subnet devices
RTC Battery Adapter	Adapter to add a size CR2032 coin cell battery (not included)

## Recommended Applications

Model	ECY-600 / 650
Air Handling Unit	■
Multi-Zone Application	■
Chiller	■
Boiler	■
Cooling Tower	■
Central Plant	■

## Product Specifications

### Power Supply Input (24VAC)

Input Voltage Range	24VAC; ±15%; Class 2
Power Consumption	100VA maximum; internal and external loads included 12VA typical, no load
Recommended Transformer Size	100VA
Frequency Range	50 to 60Hz

Addressing	IPv6, IPv4, or Hostname
BACnet Profile	BACnet Building Controller (B-BC))
BACnet Listing	BTL (B-BC)
BACnet Interconnectivity	BBMD forwarding capabilities BACnet MS/TP to BACnet/IP and BACnet/SC routing
BACnet Transport Layer	IP, BACnet/SC & MS/TP (optional)
Web Server Protocol	HTML5
Web Server Application Interface	REST API
BACnet MS/TP or Modbus RTU	1 × RS-485 serial communications ports
RS-485 Wiring	1-pair + Common/shield
RS-485 EOL Resistor	Built-in
RS-485 Baud Rates	9600, 19 200, 38 400, or 76 800 bps
RS-485 Addressing	Controller's Web Configuration Interface
Modbus TCP	Devices must be on the same subnet
Wireless Adapter	Optional, USB Port Connection
Wi-Fi Communication Protocol	IEEE 802.11g/n
Wi-Fi Network Types	Client, Access Point, Hotspot

### Power Supply Input (24VDC)

Input Voltage Range	24VDC; ±15%; Class 2
Power Consumption	60W maximum; internal and external loads included <sup>1</sup> 5W typical, no load
Recommended Power Supply Size	60W

<sup>1</sup>Powering external devices through the Subnet-IP does not work if input supply is in VDC.

### Current Limits

Power Supply Input	4A (internal fuse)
18V	240mA
Subnet-IP	180mA (10W)
Subnet	450mA (6.75W)
USB 2.0	500mA per port

### Subnetwork

Communication	RS-485
Cable Type	Cat 5e, 8 conductor twisted pair
Connector	RJ-45
Connection Topology	Daisy-chain

### Communications

Ethernet Connection Speed	10/100 Mbps
Cable Type	Cat 5e, 8 conductor twisted pair (unshielded)

Maximum number of standard room devices supported per controller combined <sup>1</sup>	12
Allure EC-Smart-Vue Series <sup>2</sup>	12
Allure EC-Smart-Comfort Series	6
Allure EC-Smart-Air Series <sup>2</sup>	6
EC-Multi Sensor	4
ECx-Light-4 / ECx-Light-4D / ECx-Light-4DALI / ECx-Light-DALI-A	2
ECx-Blind-4 / ECx-Blind-4LV / ECx-Blind-4SMI / ECx-Blind-4SMI-LoVo	2
Maximum number of Bluetooth low energy room devices per controller combined <sup>3</sup>	6
Allure UNITOUCH™	2
EC-Multi-Sensor-BLE	4

<sup>1</sup>For more details about supported quantities, see the Product Selection Tool available in Builder: <https://builder.distech-controls.com>.

<sup>2</sup>A controller can support a maximum of 2 Allure sensor models equipped with a CO<sub>2</sub> sensor. Any remaining connected sensors must be without a CO<sub>2</sub> sensor.

<sup>3</sup>A mixed architecture with standard room devices and Bluetooth low energy enabled devices is not recommended.

## Open-to-Wireless Adapter

Communication Protocol	EnOcean wireless standard <sup>1</sup>
Connector Type	USB
Number of Wireless Inputs	Unlimited <sup>2</sup>



<sup>1</sup>Available when an optional external Eclipse Open-to-Wireless Adapter is connected to the controller. Refer to the Open-to-Wireless Application Guide for a list of supported EnOcean wireless modules.

<sup>2</sup>Wireless inputs will only be limited by physical distance between the EnOcean devices and the Eclipse Open-to-Wireless Adapter.

## Subnet-IP

Subnet-IP Connection Speed	10/100 Mbps
Cable Type	Cat 5e, 8 conductor twisted pair
Subnet-IP Voltage	55VDC (software-enabled) <sup>1</sup>

<sup>1</sup>Powering external devices through the Subnet-IP does not work if input supply is in VDC.

## Hardware

Processor	Sitara ARM processor
CPU Speed	1GHz
Memory	4GB Non-volatile Flash (applications & storage) 512MB RAM
Co-processor <sup>1</sup>	STM32 (ARM Cortex M0+) MCU 32-bit
MCU Speed	64 MHz
MCU Memory	512KB Non-volatile Flash (system) 144KB RAM
Real Time Clock (RTC)	Real Time Clock with rechargeable battery Supports SNTP network time synchronization

RTC Battery	20 hours charge time, 20 days discharge time Up to 500 charge / discharge cycles MS621T coin cell battery; an adapter is available to add a size CR2032 coin cell battery with the external connector
Ethernet	3 switched RJ-45 Ethernet ports (Supported Protocols: BACnet/IP, Modbus TCP, NTP, and REST) Primary and secondary Ethernet ports with integrated fail-safe for daisy-chain operation
USB Connections	2 × USB 2.0 Ports
RS-485 Serial Communications	Screw terminals (Supported Protocols: BACnet MS/TP or Modbus RTU)
Subnet	RJ-45
Green LED	Power status, I/O, Ethernet Traffic, Subnet-IP AUX, and RS-485 TX
Orange LED	Controller status, Subnet-IP PWR, RS-485 RX

<sup>1</sup>Dedicated for IO control and MSTP

## Environmental

Operating Temperature <sup>1</sup>	<i>ECY-600</i> : -40 to 158°F (-40 to 70°C) <sup>2</sup> <i>ECY-650</i> : -4 to 122°F (-20 to 50°C) <sup>3</sup>
Storage Temperature	<i>ECY-600</i> : -40 to 185°F (-40 to 85°C) <i>ECY-650</i> : -22 to 176°F (-30 to 80°C)
Relative Humidity	0 to 90% non-condensing
Ingress Protection Rating	IP20
Nema Rating	1

<sup>1</sup>Some applications may be limited at high operating temperatures.

<sup>2</sup>For controllers not equipped with an operator interface, the internal temperature must not exceed 185°F (85°C).

<sup>3</sup>For controllers equipped with an operator interface, the internal temperature must not exceed 158°F (70°C).

## Mechanical

Dimensions (H × W × D)	<i>ECY-600</i> : 4.79 × 7.36 × 2.46" (121.60 × 187.00 × 62.58 mm) <i>ECY-650</i> : 4.79 × 5.63 × 2.91" (121.60 × 143.00 × 73.91 mm)
Shipping Weight	1.45lbs (0.66kg)
Mounting	DIN rail or screw mounting
Enclosure Material	Flame retardant/Polycarbonate (FR/PC)
Enclosure Rating <sup>1</sup>	Plastic housing, UL94-5VB flammability rating

<sup>1</sup>All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

## Standards and Regulations

CE Emission and CE Immunity	EN 63044-5-1 (2019) EN 63044-5-2 (2019)
FCC	Compliance with FCC rules part 15, subpart B, class B

ICES Compliance ICES-003  
 UL Listed (CDN & US) UL916 Energy management equipment



## Resistance/Thermistor

Range 0 to 350KΩ  
 Supported Thermistor Types Any that operated in this range

## Pre-configured Temperature Sensor Types:

Thermistor 10KΩ Type 2, 3 (10KΩ @ 77°F; 25°C)  
 Platinum Pt1000 (1KΩ @ 32°F; 0°C)  
 Nickel RTD Ni1000 (1KΩ @ 32°F; 0°C)  
 RTD Ni1000 (1KΩ @ 69.8°F; 21°C)

## ECY-650 LCD Display

Display Type Backlit-color LCD  
 Display Resolution 400 W x 240 H pixels (WQVGA)  
 Effective Viewing Area (W × H) 2.26 × 1.36" (57.3 × 34.54mm) diagonal: 2.63" (66.9mm)  
 Menu Navigation Jog dial turn, select navigation with Exit button

## Universal Inputs (UI) General

Input Type Universal; software configurable  
 Input Resolution 16-Bit analog / digital converter  
 Power Supply Output 18VDC; maximum 240mA  
 Auto-reset fuse Provides 24VAC over voltage protection

## Universal Outputs (UO) General

Output Type Universal; software configurable  
 Output Resolution Converter 10-bit digital to analog Converter  
 Output Protection Built-in snubbing diode to protect against back-EMF, for example when used with a 12VDC relay  
 Output is internally protected against short circuits  
 Load Resistance Minimum 200 Ω for 0-10VDC and 0-12VDC outputs  
 Maximum 500 Ω for 0-20mA output  
 Auto-reset Fuse Provides 24VAC over voltage protection

## Contact

Type Dry Contact

## Pulse/Counter

### UI1 to UI4

Pulse Input SO output compatible  
 Maximum Frequency 100HZ maximum  
 Minimum Duty Cycle 5ms On / 5ms Off

### 0 to 12VDC (On/Off)

Range 0 to 12VDC  
 Source Current Maximum 60mA at 12VDC (minimum load resistance 200Ω)

### UI5 to UI16

Type Dry Contact  
 Maximum Frequency 1HZ maximum  
 Minimum Duty Cycle 500ms On / 500ms Off

## PWM

Range Adjustable period from 2 to 65 seconds  
 Thermal Actuator Management Adjustable warm up and cool down time

### 0 to 10VDC

Range 0 to 10VDC (40kΩ input impedance)

## Floating

Minimum Pulse On/Off Time 500 milliseconds  
 Drive Time Period Adjustable

### 0 to 5VDC

Range 0 to 5VDC (high input impedance)

### 0 to 10VDC

Range 0 to 10VDC


### 0 to 20mA

Internal Resistor 249 ohm  
 External Resistor 249 ohm


### 0 to 20mA

Range 0 to 20mA  
 Type Current source

# Dimensions

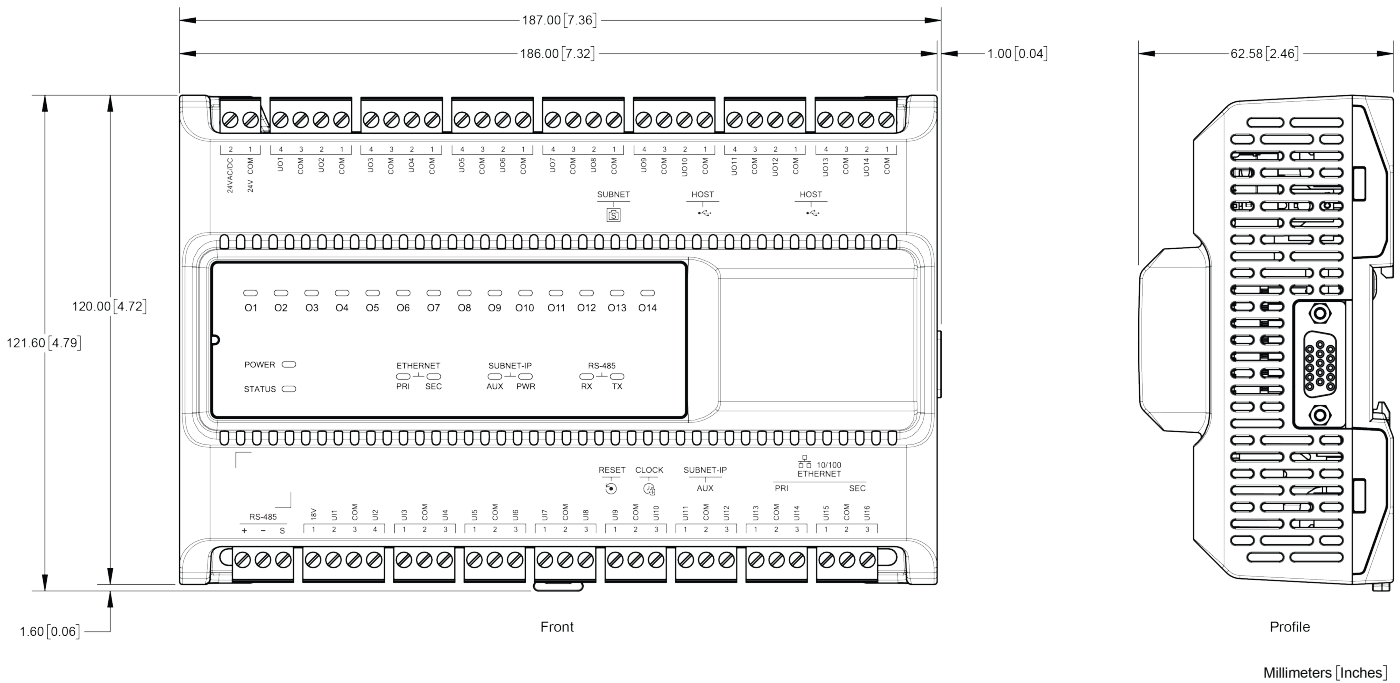

*Controllers not equipped with an operator interface*

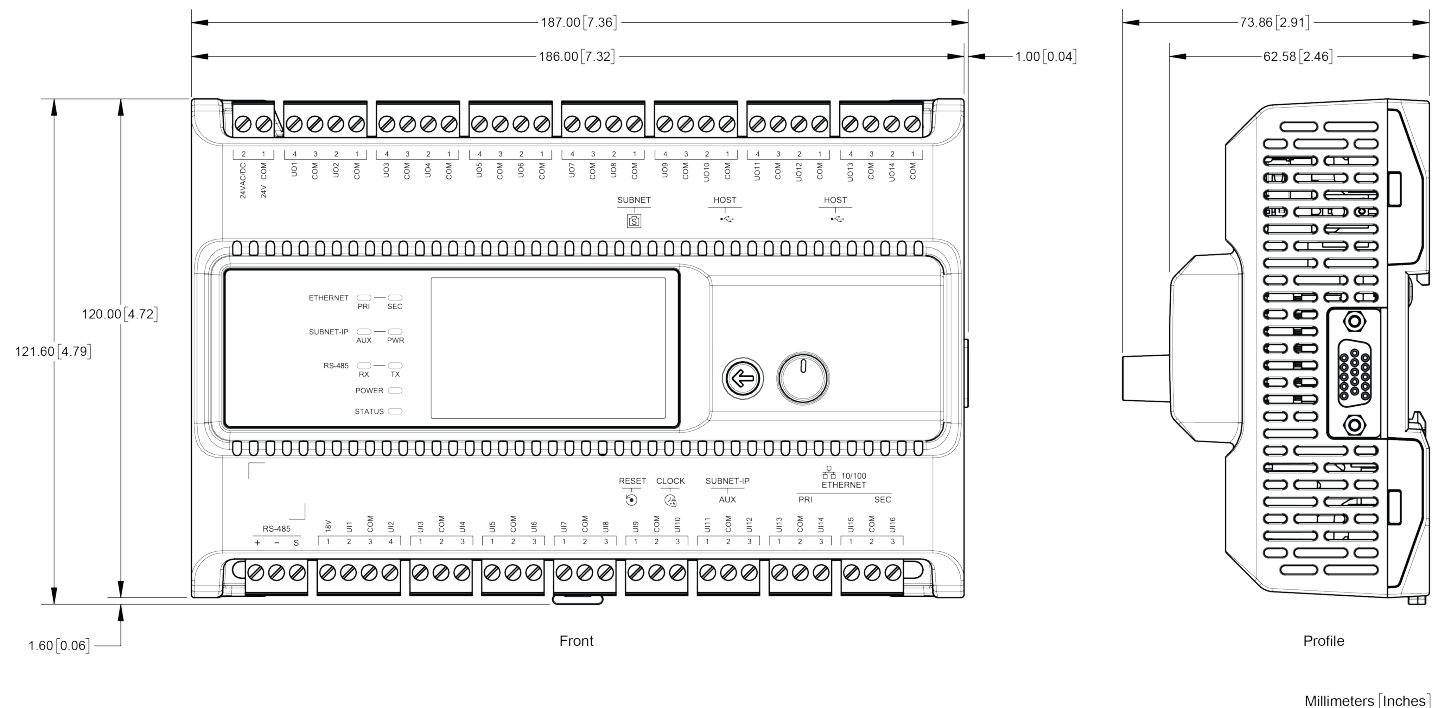

*Controllers equipped with an operator interface*

Specifications subject to change without notice.

Eclipse, Distech Controls, the Distech Controls logo, EC-Net, Allure, and Allure Unitouch are trademarks of Distech Controls Inc. BACnet is a registered trademark of ASHRAE; BTL is a registered trademark of the BACnet Manufacturers Association. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license. All other trademarks are property of their respective owners.

©, Distech Controls Inc., 2025 All rights reserved.

Global Head Office - 4205 place de Java, Brossard, QC, Canada, J4Y 0C4EU Head Office - ZAC de Sacuny, 558 avenue Marcel Mériex, 69530 Brignais, France