

### Overview

The **ECx-Blind Series** Expansion Modules are microprocessor-based interfaces that extend the number of inputs and outputs provided by the ECL/ECB-PTU Series controllers as well as ECL/ECB-VAV controllers. When connected to one of these HVAC programmable controllers, each expansion module can control 4 motorised shades / sunblinds.

As part of the Smart Room Control solution, the ECx-Blind Series expansion module can be freely combined with ECx-Light-4/4D and ECx-Light-4DALI lighting modules to control up to 8 light groups or DALI buses, and 8 shade/sunblind motors.

The ECx-Light/Blind expansion modules operate off of a separate sub-network bus governed by the main HVAC controller. This optimizes the control possibilities while allowing such a modular solution (HVAC controller + expansion modules) to be interpreted as a single device by the network, thereby avoiding unnecessary system overloading.

In addition, by positioning the expansion modules directly in ceilings, close to the shade / sunblind motors, the installation effort is reduced. As well, connecting the module to the main HVAC controller through a single RJ-45 cable reduces wiring costs and minimizes the risk of errors.

Moreover, the internal electronics of the ECx-Blind-4 models being powered by the host controller, the shade / sunblind consumption can easily be monitored, allowing for energy counting, and allowing the supervisor to instantly detect abnormal power usage and anticipate maintenance as part of a proactive preventive maintenance program.

Custom program the ECx-Blind expansion modules directly when configuring the main HVAC controller using EC-*gfx*Program. This allows you to quickly and easily create your own control sequences capable of meeting the most demanding requirements of any engineering specification.

### Applications

- 100-240 VAC shades / sunblinds
- 24 VDC shades / sunblinds

### Features & Benefits

- A wide range of lighting and shade / sunblind expansion modules that enables smart cross-management of HVAC, lighting, and shades / sunblinds as a whole, creating a unique Smart Room Control solution.
- The main HVAC controller and its associated expansion modules form a single device on the network that reduces network traffic and facilitates BMS integration.
- Seen as an extension of the main HVAC controller when configuring, allowing you to save engineering time.
- Quick-link connectors for direct installation into the ceilings, or traditional detachable connectors for use with optional strain reliefs and terminal block covers. This may eliminate the need for a protective enclosure in some jurisdictions.
- Integrated digital inputs to interface with shade / sunblind switches, window contacts, etc...
- Fail-safe mode to comply with most regulation requirements.
- The ECx-Blind-4 has a separate power supply allowing for dedicated metering leading to more accurate energy consumption analysis.
- The ECx-Blind-4LV models have an embedded power supply that can eliminate the need for an external power supply to power the controlled device.

## ECx-Blind Expansion Modules



| Model   | ECx-Blind-4-WD | ECx-Blind-4-ST | ECx-Blind-4LV-WD | ECx-Blind-4LV-ST |
|---|----------------|----------------|------------------|------------------|
| Digital Inputs                                      | 4              | 4              | 4                | 4                |
| Line-powered Shade / Sunblind Outputs               | 4              | 4              |                  |                  |
| 24 VDC Shade / Sunblind Outputs                     |                |                | 4                | 4                |
| 24 VDC Power Supply Outputs                         |                |                | ■                | ■                |
| Internal electronics powered by the host controller | ■              | ■              |                  |                  |
| 100-240 VAC power supply                            | ■              | ■              | ■                | ■                |
| Quick-link connectors                               | ■              |                | ■                |                  |
| Traditional detachable connectors.                  |                | ■              |                  | ■                |

## Required External Connectors

| Model            | Supplier | Type   | Connector Reference | Number | Use                                  | Provided |
|------------------|----------|--|---------------------|--------|--------------------------------------|----------|
| ECx-Blind-4-WD   | Wieland  | Female connector with strain relief GST15I3S B1 ZR1W WS - 3 poles - marked L G N | 91.931.3053.0       | 1      | Power supply                         | -        |
|                  | Wieland  | Female connector, pitch 5,08 mm, - 6 poles - marked 1 to 6                       | 25.340.0653.0       | 1      | Digital inputs                       | ■        |
| ECx-Blind-4-ST   | Wieland  | Male connector with strain relief GST15I4S S1 ZW1V WS - 4 poles - marked N G 1 2 | 91.942.3053.0       | 4      | Shade / sunblind outputs             | -        |
|                  | Wieland  | Female connector, pitch 5,08 mm, - 3 poles - marked 1 to 3                       | 25.340.0353.0       | 1      | Power supply                         | ■        |
|                  | Wieland  | Female connector, pitch 5,08 mm, - 4 poles - marked 1 to 4                       | 25.340.0453.0       | 4      | Shade / sunblind outputs             | ■        |
| ECx-Blind-4LV-WD | Wieland  | Female connector, pitch 5,08 mm, - 6 poles - marked 1 to 6                       | 25.340.0653.0       | 1      | Digital inputs                       | ■        |
|                  | Wieland  | Female connector with strain relief GST15I3S B1 ZR1W WS - 3 poles - marked L G N | 91.931.3053.0       | 1      | Power supply                         | -        |
|                  | Wieland  | Female connector, pitch 5,08 mm, - 4 poles - marked 1 to 4                       | 25.340.0453.0       | 1      | Motor outputs                        | ■        |
| ECx-Blind-4LV-ST | Wieland  | Female connector, pitch 5,08 mm, - 6 poles - marked 1 to 6                       | 25.340.0653.0       | 2      | Motor/24VDC outputs & digital inputs | ■        |
|                  | Wieland  | Female connector, pitch 5,08 mm, - 3 poles - marked 1 to 3                       | 25.340.0353.0       | 1      | Power supply                         | ■        |
|                  | Wieland  | Female connector, pitch 5,08 mm, - 4 poles - marked 1 to 4                       | 25.340.0453.0       | 1      | Motor outputs                        | ■        |
|                  | Wieland  | Female connector, pitch 5,08 mm, - 6 poles - marked 1 to 6                       | 25.340.0653.0       | 2      | Motor/24VDC outputs & digital inputs | ■        |


## Complementary Products

### External Connectors



Line of required external connectors

### Strain Relief & Terminal Blocks Covers



Cover designed to conceal the wire terminals. Required to meet local safety regulations in certain jurisdictions.

### EC-Multi-Sensor Series



Line of in-ceiling multi-sensors. Models are available with presence detection, light sensor, temperature sensor, and infrared receiver.


### Smart-Sense Room Control Mobile App




Remote Room Control Application for iPhone®, iPad®, and Android™ devices

## Subnetwork Overview

The Smart Room Control solution combines a main HVAC Controller with expansion modules dedicated to lighting and sunblind management to form a modular solution that uses a single point on the network.

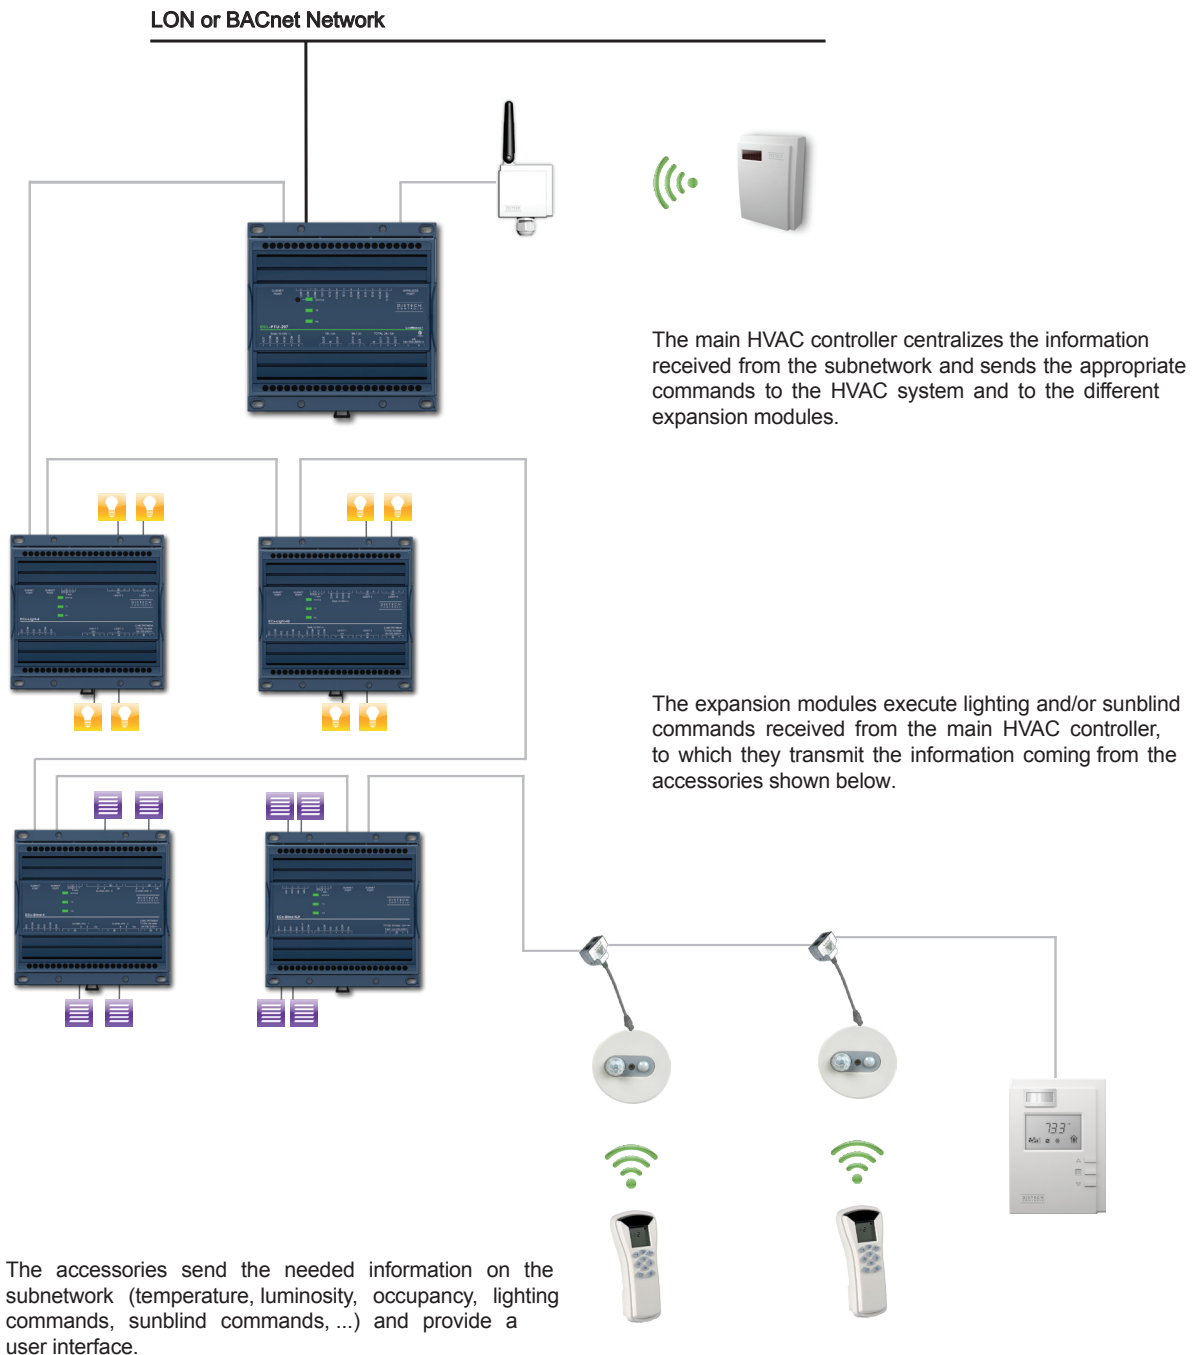

## ECx-Blind-4 Dimensions

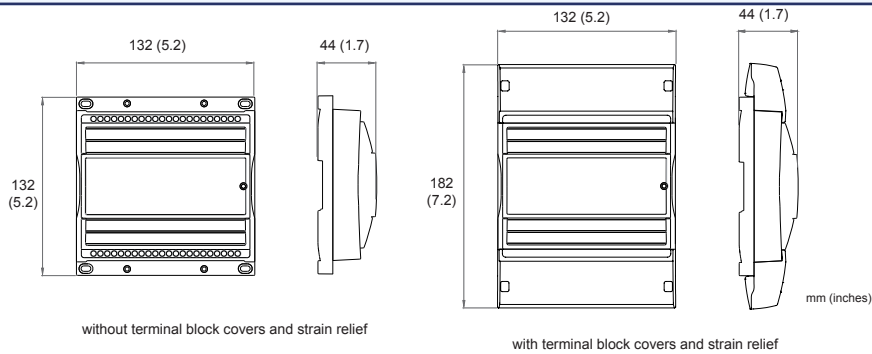


## ECx-Blind-4 Specifications

|                              |   |                                  |   |
|------------------------------|---|----------------------------------|---|
| <b>Power</b>                 |   | <b>Subnetwork<sup>1</sup></b>    |   |
| Voltage                      | 100-240 VAC; -15%/+10%; 50/60 Hz;   | Communication                    | RS-485  |
| Protection                   | 8.0 A external circuit breaker type C (250 VAC min) or 8.0 fast acting, high breaking fuse (250 VAC min)  | Cable                            | Cat 5e, 8 conductor twisted pair  |
| Typical Power Consumption    | 0.3 W typical on the RJ45 Link + all external loads   | Connector                        | RJ-45   |
| Maximum Power Consumption    | 8.0 A   | Topology                         | Daisy-chain configuration   |
| Overvoltage Category         | II - 2.5 kV   | <b>Inputs<sup>2</sup></b>        |   |
| <b>Hardware</b>              |   | Digital Inputs                   | Dry Contact 0-3.3 VDC   |
| Processor                    | STM32 (ARM Cortex™ M3) MCU, 32 bit  | (DI1, DI2, DI3, DI4)             |   |
| CPU Speed                    | 36 MHz  | <b>Outputs</b>                   |   |
| Memory                       | 32 kB Non-volatile Flash<br>6 kB SRAM   | Shade / sunblind Outputs         | Same voltage as power supply  |
| Status Indicator             | Green LEDs: Device & Power Status, LAN Tx & Rx  | (BLIND1, BLIND2; BLIND3, BLIND4) | 2.0 A max (inductive or resistive load)<br>Current Peak 4 A max < 20ms<br>1 : Shade / sunblind UP command<br>2 : Shade / sunblind DOWN command  |
| <b>Environmental</b>         |   | <b>Standards and Regulation</b>  |   |
| Operating Temperature        | +5°C to +40°C (41°F to 104°F)   | CE - Emission <sup>3</sup>       | IEC61000-6-3: 2006 + A1: ed.2010 - Generic standards for residential, commercial and light-industrial environments  |
| Storage Temperature          | -20°C to 70°C (-4°F to 158°F)   | CE - Immunity <sup>3</sup>       | IEC61000-6-1: 2005 - Generic standards for residential, commercial and light-industrial environments  |
| Relative Humidity            | +20 to 90% Non-condensing   | FCC                              | This device complies with FCC rules part 15, subpart B, class B   |
| Altitude                     | < 2000 m  | UL Listed (CDN & US)             | UL 61010-1 Safety Requirements For Electrical Equipment For Measurement, Control, And Laboratory Use - Part 1: General Requirements - Edition 2 - Revision Date 2008/10/28  |
| Pollution Degree             | 2   | Material <sup>4</sup>            | CSA C22.2 NO. 61010-1 Safety Requirements For Electrical Equipment For Measurement, Control, And Laboratory Use - Part 1: General Requirements - Edition 2 - Revision Date 2008/10/01<br>File number: E352591<br>UL94-5VB |
| <b>Enclosure</b>             |   | CE - Electrical Safety           | EN 60730-1 : 2011 - Automatic electrical controls for household and similar use - Part 1: General requirements  |
| Material                     | Flame retardant ABS   | (Approved by an external Lab)    |   |
| Color                        | Blue casing   |                                  |   |
| Dimensions                   | 132 × 132 × 44 mm (5.2 × 5.2 × 1.7")  |                                  |   |
| - with terminal block covers | 132 × 182 × 44 mm (7.2 × 5.2 × 1.7")  |                                  |   |
| Shipping Weight              | 0.35 kg (0.77 lbs)  |                                  |   |
| IP                           |   |                                  |   |
| -WD models                   | 30  |                                  |   |
| -ST models                   | 30 when equipped with strain relief and terminal block cover  |                                  |   |
| Installation                 | Direct din-rail mounting or wall-mounting - Refer to the Hardware Installation Guide for more information |                                  |   |



- ECL-PTU Series and ECB-PTU Series controllers support 2 ECx-Light + 2 ECx-Blind, in daisy-chain configuration. For ECL-VAV and ECB-VAV controllers: The permitted quantities of supported ECx-Light/Blind expansion modules can be found by using the room device calculator spreadsheet, which is available for download from Distech Controls' SmartSource: **VAV- Smart Room Control Device Calculator.xlsx**
- SELV (Safety Extra Low Voltage) inputs/outputs.
- WD models can be directly mounted in false ceilings. -ST models must be mounted with strain reliefs and terminal block covers or in a junction box, as required to meet local safety regulations in your jurisdiction.
- All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive.

## ECx-Blind-4LV Dimensions

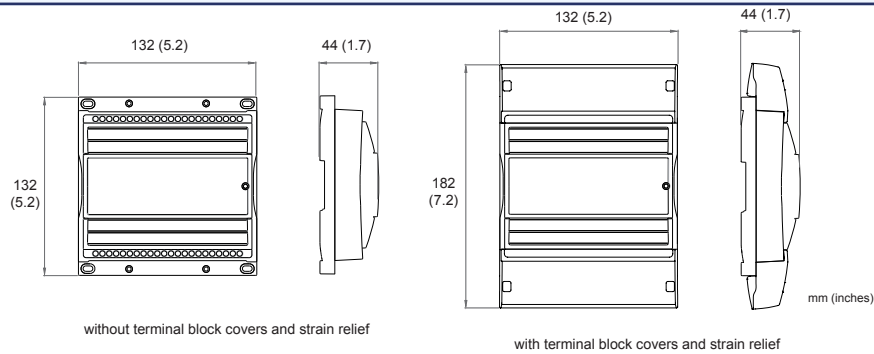

## ECx-Blind-4LV Specifications

|                                     |   |   |  |
|-------------------------------------|---|---|--|
| <b>Power</b>                        |   | <b>Subnetwork<sup>1</sup></b>   |  |
| Voltage                             | 100-240 VAC; -15%/+10%; 50/60 Hz;   | Communication   | RS-485   |
| Protection                          | 2.0 A external circuit breaker type C or 2.0 A fast acting high breaking external fuse (250 VAC min)      | Cable   | Cat 5e, 8 conductor twisted pair   |
| Typical Power Consumption           | < 1 W + all external loads  | Connector   | RJ-45  |
| Maximum Power Consumption           | 1.2 A   | Topology  | Daisy-chain configuration  |
| Overvoltage Category                | II - 2.5 kV   | <b>Inputs<sup>2</sup></b>   |  |
| <b>Hardware</b>                     |   | Digital Inputs (DI1, DI2, DI3, DI4)   | Dry Contact 0-3.3 VDC  |
| Processor                           | STM32 (ARM Cortex™ M3) MCU, 32 bit  | <b>Outputs<sup>2</sup></b>  |  |
| CPU Speed                           | 36 MHz  | Shade / sunblind Outputs (M1+, M1-, M2+, M2-, M3+, M3-, M4+, M4-)   | 24 VDC (see <i>On-Board 24 VDC Power Supply</i> for more specifications)<br>Mx+ Shade / sunblind UP command<br>Mx- Shade / sunblind DOWN command<br>1 A max. per output    |
| Memory                              | 32 kB Non-volatile Flash<br>6 kB SRAM   | 24 VDC Outputs  | 24 VDC on-board generated (see <i>On-Board 24 VDC Power Supply</i> for more specifications)  |
| Status Indicator                    | Green LEDs: Device & Power Status, LAN Tx & Rx  | <b>Standards and Regulation</b>   |  |
| <b>Environmental</b>                |   | CE - Emission <sup>3</sup>  | IEC61000-6-3: 2006 + A1: ed.2010 - Generic standards for residential, commercial and light-industrial environments   |
| Operating Temperature               | +5°C to +40°C (41°F to 104°F)   | CE - Immunity <sup>3</sup>  | IEC61000-6-1: 2005 - Generic standards for residential, commercial and light-industrial environments   |
| Storage Temperature                 | -20°C to 70°C (-4°F to 158°F)   | FCC   | This device complies with FCC rules part 15, subpart B, class B  |
| Relative Humidity                   | +20 to 90% Non-condensing   | UL Listed (CDN & US)  | UL 61010-1 Safety Requirements For Electrical Equipment For Measurement, Control, And Laboratory Use - Part 1: General Requirements - Edition 2 - Revision Date 2008/10/28 |
| Altitude                            | < 2000 m  | CSA C22.2 NO. 61010-1 Safety Requirements For Electrical Equipment For Measurement, Control, And Laboratory Use - Part 1: General Requirements - Edition 2 - Revision Date 2008/10/01 |  |
| Pollution Degree                    | 2   | File number: E352591  |  |
| <b>On-Board 24 VDC Power Supply</b> |   | <b>Material<sup>4</sup></b>   |  |
| Use                                 | Used to power both shade / sunblind outputs and 24 VDC outputs  | CE - Electrical Safety  | EN 60730-1 : 2011 - Automatic electrical controls for household and similar use - Part 1: General requirements   |
| Voltage <sup>2</sup>                | 24 VDC; ±10%  | (Approved by an external Lab)   |  |
| Current                             | 2.0 A max. in aggregate (48 W @ 24 VDC)   |   |  |
| Protection                          | Short-circuit protected   |   |  |
| <b>Enclosure</b>                    |   |   |  |
| Material                            | Flame retardant ABS   |   |  |
| Color                               | Blue casing   |   |  |
| Dimensions                          | 132 × 132 × 44 mm (5.2 × 5.2 × 1.7")  |   |  |
| - with terminal block covers        | 132 × 182 × 44 mm (7.2 × 5.2 × 1.7")  |   |  |
| Shipping Weight                     | 0.36 kg (0.79 lbs)  |   |  |
| IP                                  |   |   |  |
| -WD models                          | 30  |   |  |
| -ST models                          | 30 when equipped with strain relief and terminal block cover  |   |  |
| Installation                        | Direct din-rail mounting or wall-mounting - Refer to the Hardware Installation Guide for more information |   |  |



- ECL-PTU Series and ECB-PTU Series controllers support 2 ECx-Light + 2 ECx-Blind, in daisy-chain configuration. For ECL-VAV and ECB-VAV controllers: The permitted quantities of supported ECx-Light/Blind expansion modules can be found by using the room device calculator spreadsheet, which is available for download from Distech Controls' SmartSource: [VAV- Smart Room Control Device Calculator.xlsm](#)
- SELV (Safety Extra Low Voltage) inputs/outputs.
- WD models can be directly mounted in false ceilings. -ST models must be mounted with strain reliefs and terminal block covers or in a junction box, as required to meet local safety regulations in your jurisdiction.
- All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive.

## Total Quality Commitment

All Distech Controls product lines are built to meet rigorous quality standards. Distech Controls is an ISO 9001 registered company.

©, Copyright Distech Controls Inc., 2013. All rights reserved. Specifications subject to change without notice.

Distech Controls, the Distech Controls logo, Open-to-Wireless, ECO-Vue, Allure and EC-Net<sup>AX</sup> are trademarks of Distech Controls Inc; LONWORKS, LON, LONMARK, LNS, LonTalk are registered trademarks of Echelon Corporation; BACnet is a registered trademark of ASHRAE; Niagara<sup>AX</sup> Framework is a registered trademark of Tridium, Inc.; ARM Cortex is a registered trademark of ARM Limited. EnOcean is a registered trademark of EnOcean GmbH. All other trademarks are property of their respective owners.

