




ECB-600 Series & ECx-400 Series

BACnet B-AAC Programmable Controllers and I/O Extension Modules

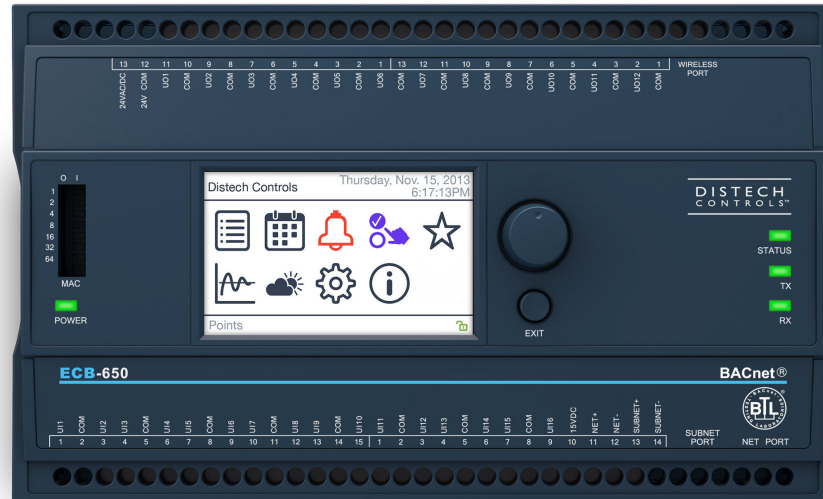

Overview

The ECB-600 Series controllers are microprocessor-based programmable controllers designed to control various building automation applications such as air handling units, chillers, boilers, pumps, cooling towers, and central plant applications. This series supports up to two ECx-400 Series I/O extension modules.

This controller uses the BACnet® MS/TP LAN communication protocol and is BTL®-Listed as BACnet Advanced Application Controllers (B-AAC).



Applications

These controllers meet the requirements of the following applications:

- ☐ Central Plant
- ☐ Air Handling Units
- ☐ Multi-Zone Applications
- ☐ Chillers
- ☐ Boilers
- ☐ Cooling Towers
- ☐ Roof Top Units
- ☐ Power Measurement

Features & Benefits

Universal Inputs and Outputs

This controller has various software configurable universal inputs and software configurable universal outputs, and covers all medium to large-size industry-standard HVAC applications.

This series supports up to two ECx-400 Series I/O extension modules that operate off of a separate sub-bus, giving this controller a total of up to 40 universal inputs and 36 universal outputs.

Highly Accurate Universal Inputs


Highly accurate universal inputs support thermistors and resistance temperature detectors (RTDs) that range from 0 Ohms to 350,000 Ohms, as well as support for inputs requiring 0 to 10VDC or a pulse count. 0-20mA inputs and outputs have a jumper that eliminates the need for external resistors. This provides the freedom of using your preferred or engineer-specified sensors, in addition to any existing ones. The first four universal inputs support fast pulse count reading up to 50 Hz for gas, water, and electric meters and are compatible with an SO rated (optically-isolated) output.

Rugged Inputs/Outputs

Rugged hardware inputs and outputs eliminate need for external protection components, such as diodes for 12V DC relays.

Programmability

Supports Distech Controls' EC-gfxProgram, which makes Building Automation System (BAS) programming effortless by allowing you to visually assemble building blocks together to create a custom control sequence for any HVAC / building automation application.

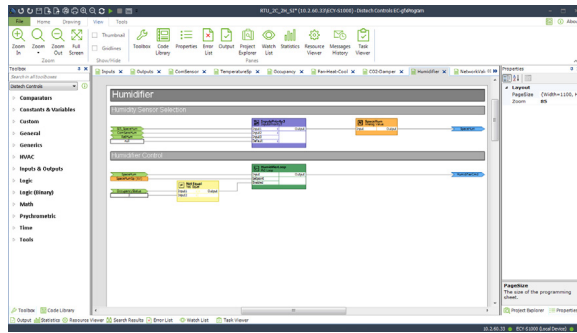

Increased Energy Efficiency

Improves energy efficiency when combined with:

- ☐ CO₂ sensors as part of a demand-controlled ventilation strategy that adjusts the amount of fresh air intake according to the number of building occupants
- ☐ Variable-frequency drives to adjust motor speed according to the instantaneous demand of the application.

Open-to-Wireless™ Solution



The controllers are Open-to-Wireless™ ready, and when paired with the Wireless Receiver, work with a variety of wireless battery-less sensors and switches, to reduce the cost of installation and minimize the impact on existing partition walls. For supported frequencies in your area, refer to the [Open-to-Wireless Solution Guide](#).

Available with an optional Wireless Receiver that supports up to 28 wireless inputs to create wire-free installations.

HOA Switches & Potentiometers

Certain models have the convenience of supervised Hand-Off-Auto (HOA) switches and potentiometers that provide feedback on an operator's manual override of an output to the controller's code. HOA switches are ideal for testing purposes or when performing equipment commissioning and maintenance.

Allure™ Series Communicating Sensor Support

These controllers work with a wide range of sensors, such as the Allure Series Communicating Sensors that are designed to provide intelligent sensing and control devices for increased user experience and energy efficiency.


- ☐ Allure EC-Smart-Vue sensors feature a backlit-display and graphical menus that provide precise environmental zone control, with any combination of the following: temperature, humidity, CO₂, and motion sensor.
- ☐ Allure EC-Smart-Comfort sensors feature colored LED indicators to provide user feedback, rotary knobs to adjust the setpoint offset and fan speed, and an occupancy override push button. This sensor can also be expanded with a combination of up to 4 add-on push button modules for lighting and shade/ sunblind control.
- ☐ Allure EC-Smart-Air sensors combine precise environmental sensing in a discreet and alluring enclosure for temperature, humidity, and CO₂.



Operator Interface

The ECB-650 model has a full-color backlit-display and a jog dial for turn and select navigation to access a wide range of internal controller functions:

- ☐ View and override values. The status is color coded to show if the value is overridden.
- ☐ Visually tune PID loops with system response graphing.
- ☐ View active alarm list including details and acknowledge alarms.
- ☐ View and modify schedules and calendars through a graphic interface. Also create or delete schedule events, special events, and calendar entries.
- ☐ Create a list of favorites to provide quick access to commonly-used values.
- ☐ Multi-User access management.
- ☐ Multilingual interface: English, French, German, etc.

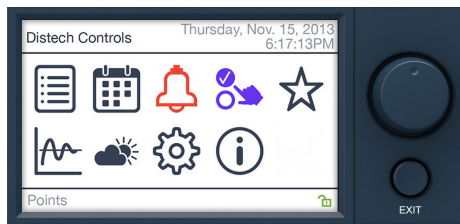





UUKL Smoke Control System

The Distech Controls UUKL Smoke Control System is designed to protect occupants and buildings in the event of a building fire by maintaining tenable evacuation routes and containing smoke within the fire area. It is a unique Niagara^{AX}-based system that complies with the Underwriters Laboratories Inc[®] (UL) requirements for UL 864 UUKL 9th Edition Smoke Control Listing.

For detailed specifications, requirements, and procedures for installing, wiring, and operating UUKL Listed equipment, refer to the Distech Controls UUKL Listed documentation on SmartSource: Smoke Control Design Guide (05DI-UGULDES-10) and the Smoke Control Application Guide (05DI-UGULAPP-10).

Model Selection

				
Model	ECB-600	ECB-610	ECB-650	ECB-600 UUKL
Points	28-Point Controller	28-Point Controller with HOA	28-Point Controller	28-Point Controller
Universal hardware inputs	16	16	16	16
Wireless inputs ¹	28	28	28	28
15 Vdc Power Supply	■	■	■	■
Universal outputs	12	12	12	12
HOA switch & potentiometer		■		
Operator interface: interactive color display to monitor and override controller parameters			■	
Number of ECx Modules Supported	2	2	2	2
UL 864, 9th Edition, UUKL Listed Smoke Control Equipment ²				■
California State Fire Marshal Listed				■

1. All controllers are Open-to-Wireless ready. Available when an optional Wireless Receiver is connected to the controller. Some wireless sensors may use more than one wireless input from the controller.

2. The UL 864 UUKL Listed Smoke Control Equipment is used only in Distech Controls' UUKL smoke control system. For detailed specifications, requirements and procedures for installing and operating UUKL Listed equipment refer to the Distech Controls' UUKL Smoke Control documentation on SmartSource.

Recommended Applications

Model	ECB-600	ECB-610	ECB-650	ECB-600 UUKL
Air Handling Units	■	■	■	■
Multi-Zone Application	■	■	■	
Chiller	■	■	■	
Boiler	■	■	■	
Cooling Tower	■	■	■	
Central Plant	■	■	■	
Exhaust Fan				■

BACnet Objects List





BACnet Objects List	
BACnet Calendar Objects	2
<input type="checkbox"/> Events per calendar	45
BACnet Schedule Objects	10
<input type="checkbox"/> Special events per schedule	10
BACnet PID Loop Objects	40
BACnet Input Objects (AI, BI, MSI) ¹	68 ²
BACnet Output Objects (AO, BO) ¹	12 ³
BACnet BV Objects:	
<input type="checkbox"/> Commandable ¹	20
<input type="checkbox"/> Non-Commandable	55
BACnet MSV Objects:	
<input type="checkbox"/> Commandable ¹	20
<input type="checkbox"/> Non-Commandable	55
BACnet AV Objects:	
<input type="checkbox"/> Commandable ¹	35
<input type="checkbox"/> Non-Commandable	115
BACnet Alarm Notification Classes	5

1. Supports object internally-generated alarms (intrinsic reporting) which are dynamically instantiated upon object creation.

2. This consists of Hardware Inputs, Allure Series Communicating Sensor Inputs, and Open-to-Wireless Inputs. Each ECx-400, ECx-410 or ECx-420 adds 12 input objects.

3. This consists of Hardware Outputs. Each ECx-400 or ECx-410 adds 12 output objects.

ECx-400 Series I/O Extension Modules

				
Model	ECx-400	ECx-410	ECx-420	ECx-400 UUKL
Additional points	24-Point I/O Extension Module	24-Point I/O Extension Module	12-Point I/O Extension Module	24-Point I/O Extension Module
Universal hardware inputs	12	12	12	12
15 Vdc Power Supply	■	■	■	■
Universal outputs	12	12	0	12
HOA switch		■		
UL 864, 9th Edition, UUKL Listed Smoke Control Equipment¹				■
California State Fire Marshal Listed				■

1. The UL 864 UUKL Listed Smoke Control Equipment is used only in Distech Controls' UUKL smoke control system. For detailed specifications, requirements and procedures for installing and operating UUKL Listed equipment refer to the Distech Controls' UUKL Smoke Control documentation on SmartSource.

ECx-400 Series BACnet Objects List

Model	ECx-400	ECx-410	ECx-420
BACnet Input Objects (AI, BI, MSI)¹	12 ^{2,4}	12 ^{2,4}	12 ^{2,4}
BACnet Output Objects (AO, BO)¹	12 ^{3,4}	12 ^{3,4}	
BACnet Alarm Notification Classes⁴	5	5	5

1. Supports object internally-generated alarms (intrinsic reporting).
2. This consists of Hardware Inputs.
3. This consists of Hardware Outputs.
4. Objects are in the connected ECB-600, ECB-610, or ECB-650 controller (master)

Product Specifications

Power Supply Input

Voltage Range ————— 24VAC/DC; $\pm 15\%$; Class 2

Frequency Range ————— 50/60Hz

Overcurrent Protection ————— Field replaceable fuse

Fuse Type ————— 3.0A

Power Consumption:

☐ ECB-600/ECB-610 ————— 22 VA typical plus all external loads¹, 65 VA max.

☐ ECB-650 ————— 25 VA typical plus all external loads¹, 68 VA max.

1. External loads must include the power consumption of any connected modules such as an Allure Series Communicating Sensor. Refer to the respective module's datasheet for related power consumption information.

Communications

Communication Bus ————— BACnet MS/TP

BACnet Profile ————— B-AAC¹

EOL Resistor ————— Built-in, jumper selectable

Baud Rates ————— 9600, 19 200, 38 400, or 76 800 bps

Addressing ————— Dip switch or with an Allure EC-Smart-View Series Communicating Sensor

1. Refer to Distech Controls' Protocol Implementation Conformity Statement for BACnet.

Hardware

Processor ————— STM32 (ARM Cortex™ M3) MCU, 32 bit

CPU Speed ————— 72 MHz

Memory ————— 1 MB Non-volatile Flash (applications)

————— 2 MB Non-volatile Flash (storage)

————— 96 kB RAM

Real Time Clock (RTC) ————— Built-in Real Time Clock with rechargeable battery

————— Network time synchronization is initially required

RTC Battery ————— 20 hours charge time, 20 days recharge time

————— Up to 500 charge/discharge cycles

Status Indicator ————— Green LEDs: power status & LAN Tx

————— Orange LEDs: controller status & LAN Rx

Communication Jack ————— BACnet 1/8" (3.5mm) stereo audio jack

Subnetwork

Communication ————— RS-485

Cable ————— Cat 5e, 8 conductor twisted pair

Connector ————— RJ-45

Connection Topology ————— Daisy-chain

Maximum number of supported devices per controller combined ————— 12

☐ Allure EC-Smart-View Series ————— Up to 12¹

☐ Allure EC-Smart-Comfort Series (not supported by UUKL) ————— Up to 6

☐ Allure EC-Smart-Air Series (not supported by UUKL) ————— Up to 6¹

1. A controller can support a maximum of two Allure Series Communicating Sensor models equipped with a CO₂ sensor. The remaining connected Allure Series Communicating Sensor models must be without a CO₂ sensor.

I/O Extension Modules (ECx-400 Series)

Communication _____ RS-485

Number of I/O extensions modules per controller _____ Up to 2, in daisy-chain configuration

Wireless Receiver¹

Communication Protocol _____ EnOcean wireless standard

Number of Wireless Inputs² _____ 28

Supported Wireless Receivers _____ Refer to the Open-to-Wireless Solution Guide

Cable _____ Telephone cord

☐ Connector _____ 4P4C modular jack

☐ Length (maximum) _____ 6.5ft (2m)



1. Available when an optional external Wireless Receiver module is connected to the controller. Refer to the Open-to-Wireless Solution Guide for a list of supported EnOcean wireless modules.


2. Some wireless modules may use more than one wireless input from the controller.

Mechanical

Dimensions (H × W × D):

☐ ECB-600/ECB-610 _____ 4.7 × 7.7 × 2.03" (119.38 × 195.58 × 51.47 mm)

☐ ECB-650 _____ 4.7 × 7.7 × 2.55" (119.38 × 195.58 × 64.68 mm)

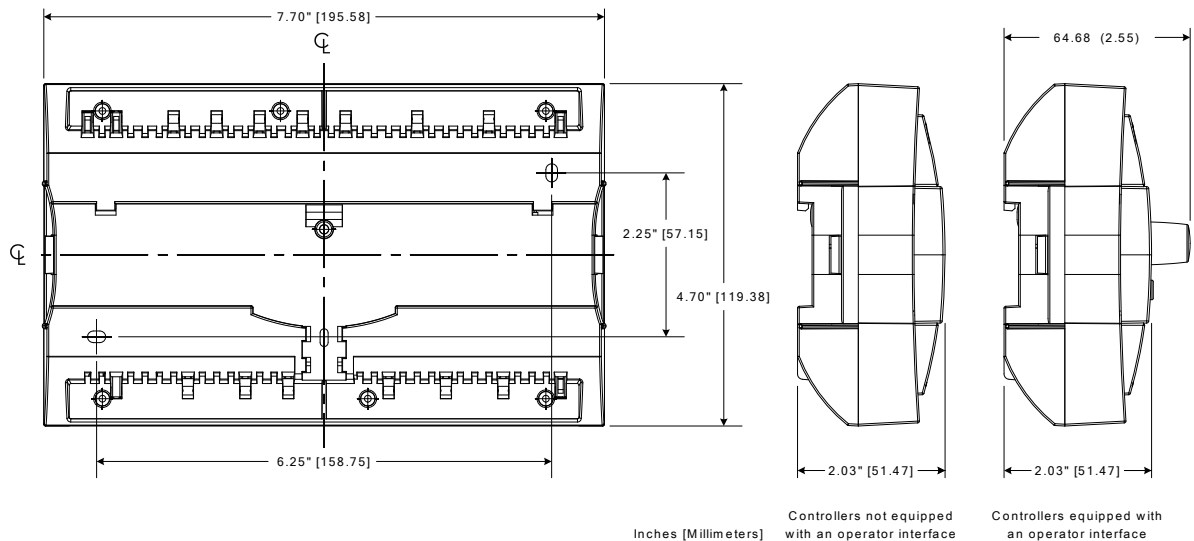

Shipping Weight:

☐ ECB-600/ECB-610 _____ 1.17lbs (0.53 kg)

☐ ECB-650 _____ 1.28lbs (0.58 kg)

Enclosure Material¹ _____ FR/ABS

Enclosure Rating _____ Plastic housing, UL94-5VB flammability rating

Plenum rating per UL1995

Color _____ Black & blue casing & grey connectors

Installation _____ Direct DIN-rail mounting or wall mounting
through mounting holes (see figure above for hole positions)

1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

Environmental

Operating Temperature ————— 32°F to 122°F (0°C to 50°C)

Storage Temperature ————— -4°F to 122°F (-20°C to 50°C)

Relative Humidity ————— 0 to 90% Non-condensing

Standards and Regulations

CE:

☐ Emission ————— EN61000-6-3: 2007; A1:2011; Generic standards for residential, commercial and light-industrial environments

☐ Immunity ————— EN61000-6-1: 2007; Generic standards for residential, commercial and light-industrial environments

FCC ————— This device complies with FCC rules part 15, subpart B, class B

UL Listed (CDN & US) ————— UL916 Energy management equipment

UL 864 ————— UL 864, 9th Edition, UUKL Listed Smoke Control Equipment
(ECB-600 UUKL model only)¹

California State Fire Marshal Listing ————— CSFM: 7300-2187:0100
(ECB-600 UUKL model only)¹

CEC Appliance Database ————— Appliance Efficiency Program²

1. For detailed specifications regarding the ECB-600 UUKL model, refer to the Distech Controls UUKL Smoke Control Design Guide.

2. California Energy Commission's Appliance Efficiency Program: The manufacturer has certified this product to the California Energy Commission in accordance with California law.



ECB-650 Display

Display Type ————— Backlit-color LCD

Display Resolution ————— 400 W x 240 H pixels (WQVGA)

Effective Viewing Area (W × H) ————— 2.4 × 1.4" (61.2 × 36.7mm)
2.8" (71mm) diagonal

Menu Navigation ————— Jog dial turn, select navigation with Exit button

Specifications - Universal Inputs (UI)

General

Input Type ————— Universal; software configurable

Input Resolution ————— 16-bit analog / digital converter

Power Supply Output ————— 15VDC; maximum 320mA

Contact

Type ————— Dry contact

Counter

UI1 to UI4:

Type ————— SO output compatible

Maximum Frequency ————— 50Hz maximum,

Minimum Duty Cycle ————— 10milliseconds On / 10milliseconds Off



UI5 to UI10:

Type ————— Dry contact

Maximum Frequency ————— 1Hz maximum,

Minimum Duty Cycle ————— 500milliseconds On / 500milliseconds Off

0 to 10VDC

Range ————— 0 to 10VDC (40k Ω input impedance)

0 to 5VDC

Range ————— 0 to 5VDC (high input impedance)

0 to 20mA

Range ————— 0 to 20mA

————— 249 Ω jumper configurable internal resistor

Resistance/Thermistor

Range ————— 0 to 350 K Ω

Supported Thermistor Types ————— Any that operate in this range

Pre-configured Temperature Sensor Types:

☐ Thermistor ————— 10K Ω Type 2, 3 (10K Ω @ 77°F; 25°C)

☐ Platinum ————— Pt1000 (1K Ω @ 32°F; 0°C)

☐ Nickel ————— RTD Ni1000 (1K Ω @ 32°F; 0°C)

————— RTD Ni1000 (1K Ω @ 69.8°F; 21°C)

Specifications - Universal Outputs (UO)

General

Output Type ————— Universal; software configurable

Output Resolution ————— 10-bit digital to analog Converter

Output Protection ————— Built-in snubbing diode to protect against back-EMF,
for example when used with a 12VDC relay
Output is internally protected against short circuits

Load Resistance ————— Minimum 200 Ω for 0-10VDC and 0-12VDC outputs

————— Maximum 500 Ω for 0-20mA output

Auto-reset fuse ————— Provides 24VAC over voltage protection

0 or 12VDC (On/Off)

Range ————— 0 or 12VDC

Source Current ————— Maximum 60 mA at 12VDC (minimum load resistance 200 Ω)

PWM

Range ————— Adjustable period from 2 to 65seconds

Thermal Actuator Management ————— Adjustable warm up and cool down time

Floating

Minimum Pulse On/Off Time ————— 500milliseconds

Drive Time Period ————— Adjustable

0 to 10VDC

Voltage Range _____ 0 to 10VDC linear
Source Current _____ Maximum 60 mA at 10VDC (minimum load resistance 200 Ω)

0 to 20mA

Range _____ 0 to 20mA
Type _____ Current source (jumper configurable)

HOA

Hand-Off-Auto switch _____ When equipped
_____ Supervision allows control logic to read the current
HOA switch and potentiometer settings
Threshold _____ Configurable
Potentiometer Voltage Range _____ 0 to 12.5VDC

Product Specifications- ECx-400 Series

Power Supply Input

Voltage Range _____ 24VAC/DC; $\pm 15\%$; Class 2

Frequency Range _____ 50/60Hz

Overcurrent Protection _____ Field replaceable fuse

Fuse Type _____ 3.0A

Power Consumption:

☐ ECx-400/ECx-410 _____ 22 VA typical plus all external loads, 50 VA max.

☐ ECx-420 _____ 10 VA typical, 16 VA max.

Communication

Communication Bus _____ RS-485

Baud Rates _____ 38 400 bps

Addressing _____ Dip Switch

Hardware

Processor _____ STM32 (ARM Cortex™ M3) MCU, 32 bit

CPU Speed _____ 64 MHz

Memory _____ 64 kB Non-volatile Flash (applications and storage)

_____ 20 kB RAM


Status Indicator _____ Green LEDs: power status & LAN Tx

_____ Orange LEDs: controller status & LAN Rx

Mechanical

Dimensions:

With Screws _____ $4.7 \times 7.7 \times 2.03$ " (119.38 × 195.58 × 51.47mm)

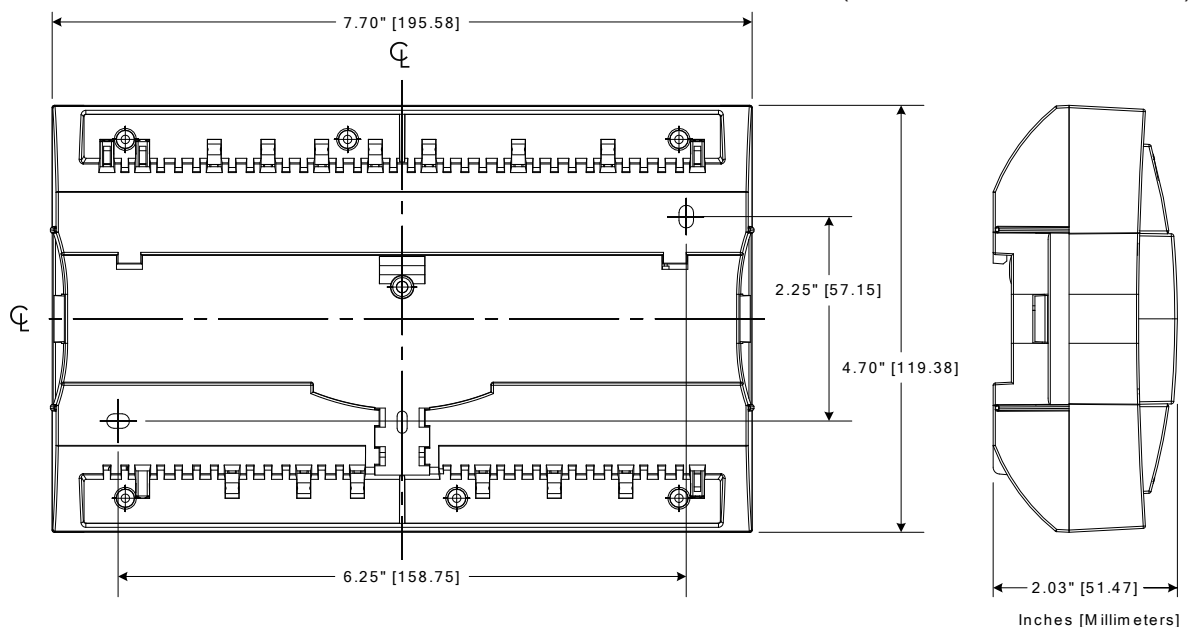

Shipping Weight ————— 1.17lbs (0.53kg)
Enclosure Material¹ ————— FR/ABS
Enclosure Rating ————— Plastic housing, UL94-5VB flammability rating
Plenum rating per UL1995
Color ————— Black & blue casing & grey connectors
Installation ————— Direct DIN-rail mounting or wall mounting
through mounting holes (see figure above for hole positions)
1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

Environmental

Operating Temperature ————— 32°F to 122°F (0°C to 50°C)
Storage Temperature ————— -4°F to 122°F (-20°C to 50°C)
Relative Humidity ————— 0 to 90% Non-condensing

Standards and Regulations

CE:

- ☐ Emission ————— EN61000-6-3: 2007; A1:2011; Generic standards for residential, commercial and light-industrial environments
☐ Immunity ————— EN61000-6-1: 2007; Generic standards for residential, commercial and light-industrial environments

FCC ————— This device complies with FCC rules part 15, subpart B, class B
UL Listed (CDN & US) ————— UL916 Energy management equipment
UL 864 ————— UL 864, 9th Edition, UUKL Listed Smoke Control Equipment
(ECx-400 UUKL model only)¹
California State Fire Marshal Listing ————— CSFM: 7300-2187:0100
(ECx-400 UUKL model only)¹

1. For detailed specifications regarding the ECx-400 UUKL model, refer to the Distech Controls UUKL Smoke Control Design Guide.



Specifications - Universal Inputs (UI)

General

Input Type ————— Universal; software configurable
Input Resolution ————— 16-bit analog / digital converter
Power Supply Output ————— 15VDC; maximum 240mA

Contact

Type ————— Dry contact

Counter

Type ————— Dry contact
Maximum Frequency ————— 1Hz maximum,
Minimum Duty Cycle ————— 500milliseconds On / 500milliseconds Off

0 to 10VDC

Range ————— 0 to 10VDC (40k Ω input impedance)

0 to 5VDC

Range ————— 0 to 5VDC (high input impedance)

0 to 20mA

Range ————— 0 to 20mA
————— 249 Ω external resistor wired in parallel

Resistance/Thermistor

Range ————— 0 to 350 K Ω

Supported Thermistor Types ————— Any that operate in this range

Pre-configured Temperature Sensor Types:

- ☐ Thermistor ————— 10K Ω Type 2, 3 (10K Ω @ 77°F; 25°C)
- ☐ Platinum ————— Pt1000 (1K Ω @ 32°F; 0°C)
- ☐ Nickel ————— RTD Ni1000 (1K Ω @ 32°F; 0°C)
————— RTD Ni1000 (1K Ω @ 69.8°F; 21°C)

Specifications - Universal Outputs (UO)

General

Output Type	Universal; software configurable
Output Resolution	10-bit digital to analog Converter
Output Protection	Built-in snubbing diode to protect against back-EMF, for example when used with a 12VDC relay Output is internally protected against short circuits
Load Resistance	Minimum 200 Ω for 0-10VDC and 0-12VDC outputs Maximum 500 Ω for 0-20mA output
Auto-reset fuse	Provides 24VAC over voltage protection

0 or 12VDC (On/Off)

Range	0 or 12VDC
Source Current	Maximum 60 mA at 12VDC (minimum load resistance 200 Ω)

PWM

Range	Adjustable period from 2 to 65seconds
Thermal Actuator Management	Adjustable warm up and cool down time

Floating

Minimum Pulse On/Off Time	500milliseconds
Drive Time Period	Adjustable

0 to 10VDC

Voltage Range	0 to 10VDC linear
Source Current	Maximum 60 mA at 10VDC (minimum load resistance 200 Ω)

0 to 20mA

Range	0 to 20mA
Type	Current source (jumper configurable)

HOA

Hand-Off-Auto switch	When equipped Supervision allows control logic to read the current HOA switch and potentiometer settings
Threshold	Configurable
Potentiometer Voltage Range	0 to 12.5VDC

Specifications subject to change without notice.

Distech Controls, the Distech Controls logo, Innovative Solutions for Greener Buildings, Allure, ECO-Vue, and Open-To-Wireless are trademarks of Distech Controls Inc.; LonWorks, LON, and LNS are registered trademarks of Echelon Corporation; BACnet is a registered trademark of ASHRAE; BTL is a registered trademark of the BACnet Manufacturers Association; NiagaraAX Framework is a registered trademark of Tridium, Inc.; EnOcean is a registered trademark of EnOcean GmbH.

All other trademarks are property of their respective owners.

©, Distech Controls Inc., 2015. All rights reserved.

