

# Indoor Ambience Monitoring Sensor

## AM100 Series

### (AM103 & AM103L)

**Milesight**



AM103 is a compact indoor ambience monitoring sensor for measurement of temperature, humidity and CO<sub>2</sub>. These data will be shown on the E-ink screen in real-time, which allow to quantify the indoor environment and comfort.

Apart from screen display, sensor data can also be transmitted using LoRaWAN®. With this low-power technology, AM103 can work for more than 3 years with 2 replaceable batteries. Combining with Milesight LoRaWAN® gateway and Milesight Development Platform solution, users can manage all sensor data remotely.

AM103 can be used in office, store, classroom, hospital, etc.

#### ◆ Features

- Integrated with multiple sensors like humidity, temperature and CO<sub>2</sub>
- Visual data and clear emoticon to understand the comfort level easily via E-ink screen
- Smart hibernate mode schedulely to save battery power
- Equipped with traffic light indicator to indicate multi-level CO<sub>2</sub> threshold alarms
- More than 3 years work without replacing batteries
- Store locally historical records and support retransmission to prevent data loss
- Built-in NFC for easy configuration
- Compliant with standard LoRaWAN® gateways and network servers
- Quick and easy management with Milesight IoT Cloud and Milesight Development Platform


## ◆ Specifications

Wireless Transmission	
Technology	LoRaWAN®
Antenna	Internal Antenna
Frequency	CN470/IN865/RU864/EU868/US915/AU915/KR920/AS923-1&2&3&4
Tx Power	16 dBm (868 MHz)/22 dBm (915 MHz)/19 dBm (470 MHz)
Sensitivity	-137dBm @300bps
Mode	OTAA/ABP Class A
Sensors	
Temperature	
Operating Principle	Digital CMOSens® technology (MEMS)
Range	-20°C ~ 60°C
Accuracy <sup>[1]</sup>	Typ. ±0.3°C (-20°C ~ 0°C), ± 0.2°C (0°C ~ 60°C)
Resolution	0.1°C
Humidity	
Operating Principle	Digital CMOSens® technology (MEMS)
Range	0% ~ 100% RH
Accuracy <sup>[2][3]</sup>	Typ. ± 2% RH (25°C)
Resolution	0.5% RH
Carbon Dioxide (CO <sub>2</sub> )	
Sensor Type	Nondispersive Infrared (NDIR)
Range	400 to 5000 ppm
Accuracy	± (30 ppm + 3 % of reading) (0°C to +50°C)
Resolution	1 ppm
Others	
Display	AM103: 2.13-inch Black & White E-Ink Screen AM103L: Not Support
Button	1 × Power/Reset Button
LED	1 × Traffic Light Status Indicator
Software	
Power On/Off	Mobile App via NFC or Power Button
Configuration	Mobile App via NFC, Downlink
Advanced Features	Calibration, Threshold Alarm, Data Storage (640 entries), Data


	Retrievability, Data Retransmission, Screen Hibernate Mode, Smart Screen Mode
<b>Physical Characteristics</b>	
Power Supply	2 × 2700 mAh ER14505 Li-SOCl <sub>2</sub> Replaceable Batteries
Battery Life <sup>[4]</sup> (10 min interval, 25°C)	<p>AM103:</p> <p>Around 4.5 Years (SF7, EU868 &amp; US915)</p> <p>Around 3 Years (SF10, EU868)</p> <p>Around 2.3 Years (SF10, US915)</p> <p>AM103L:</p> <p>Around 5 Years (SF7, EU868 &amp; US915)</p> <p>Around 3.3 Years (SF10, EU868)</p> <p>Around 2.5 Years (SF10, US915)</p>
Operating Temperature	-20°C to +60°C (E-Ink Screen: 0°C - 40°C)
Relative Humidity	0% to 95% (non-condensing)
Ingress Protection	IP30
Housing&Color	PC + ABS, White
Weight	182.5g (Batteries included)
Dimension	68 × 65 × 20.5 mm (2.68 × 2.56 × 0.81 in)
Installation	Wall Mounting via 3M Tape or Screws
<b>Approvals</b>	
Regulatory	CE, CE(RED), FCC, ISED
Environmental	RoHS

**Note:**


1. Accuracy corresponding to the temperature:

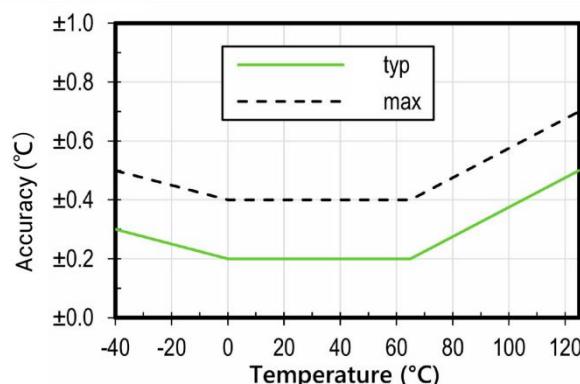

2. Accuracy corresponding to the relative humidity at 25°C:

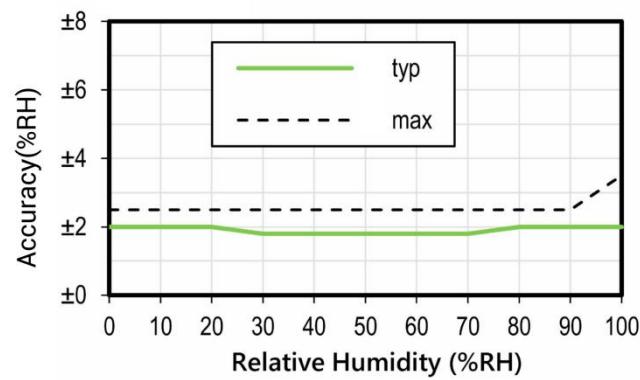

3. Typical RH accuracy corresponding to the temperature:

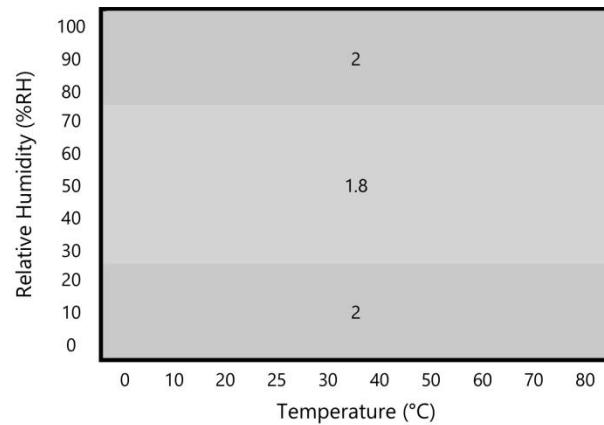

4. The battery life is tested under laboratory conditions and for guideline purposes only.

## ◆ Dimensions(mm)

