

Indoor Ambience Monitoring Sensor

Featuring LoRaWAN®

AM30x

Milesight



◆ Introduction

AM30x is a compact indoor ambience monitoring sensor for measurement of temperature, humidity, light, CO₂ concentration, TVOC, barometric pressure, PM2.5, PM10 and motion. The data will be shown on the E-ink screen in real-time, which helps to measure the indoor environment and comfort.

Sensor data is transmitted using LoRaWAN® technology. Combining Milesight LoRaWAN® gateway and Milesight Development Platform solution, users can manage all sensor data remotely.

AM30x can be used in offices, stores, classrooms, hospitals, etc.

◆ Features

- Integrated with multiple sensors like humidity, temperature, CO₂, light, barometric pressure, PM2.5, PM10, etc.
- Multiple display modes and clear emoticon to easily understand the comfort levels via screen
- Support batteries or DC power supply
- Equipped with traffic light indicator and buzzer to indicate device status and threshold alarms
- Store locally historical records and support retransmission to prevent data loss
- Compliant with standard LoRaWAN® gateways and network servers
- Quick and easy management with Milesight IoT Cloud and Milesight Development Platform

◆ Specifications


Model	AM307	AM308(L)
Wireless Transmission		
Technology		LoRaWAN®
Antenna		Internal Antenna
Frequency	CN470/RU864/IN865/EU868/US915/AU915/KR920/AS923-1&2&3&4	
Tx Power	16dBm(868MHz)/22dBm(915MHz)/19dBm(470MHz)	
Sensitivity	-137dBm @300bps	
Work Mode	OTAA/ABP Class A	
Sensors		
Temperature		
Operating Principle		Digital CMOSens® technology (MEMS)
Range		-20°C~60°C
Accuracy ^[1]		Typ. ±0.3°C (-20°C ~ 0°C), ± 0.2°C (0°C ~ 60°C)
Resolution		0.1°C
Humidity		
Operating Principle		Digital CMOSens® technology (MEMS)
Range		0% ~ 100% RH
Accuracy ^{[2][3]}		Typ. ± 2% RH (25°C)
Resolution		0.5% RH
Motion		
Operating Principle		Passive infrared (PIR)
Detection Range		80 ° Horizontal, 55 ° Vertical, 5m
Status		Vacant/Occupied
Light		
Operating Principle		Photodiode
Range		0-60000 Lux (Determine as 6 levels, 0-5)
TVOC		
Operating Principle		MOX (MEMS)
Range ^[4]		1.00 ~ 5.00 (IAQ Rating)
Accuracy		±1
Resolution		0.01
Barometric Pressure		

Operating Principle	Piezoresistive absolute pressure sensor (MEMS)				
Range	260 - 1260 hPa				
Accuracy	±0.5 hPa				
Resolution	0.1 hPa				
Carbon Dioxide (CO₂)					
Operating Principle	Nondispersive Infrared (NDIR)				
Range	400 ~ 5000 ppm				
Accuracy	± (30 ppm + 3 % of reading) (0°C~ 50°C, 0% to 85%RH)				
Resolution	1 ppm				
PM2.5 & PM10					
Operating Principle	—	Laser Scattering			
Range	—	0 ~ 1000 µg/m ³			
Accuracy	—	0~100(±10µg/m ³), 100~1000(±10 %) (-10°C~ 60°C)			
Resolution	—	1 µg/m ³			
Other Interfaces					
Display	AM307 & AM308: 4.2-inch Black & White E-Ink Screen AM308L: Not Support				
Button	1 × Power Button + 1 × Reset Button				
LED & Buzzer	1 × Traffic Light Status Indicator + 1 × Buzzer				
USB	1 × Type-C Port for Power Supply, Configuration or Console				
Software					
Configuration	1. Mobile App via NFC 2. PC software via NFC or USB Type-C port 3. Downlink				
Advanced Features	Calibration, Threshold Alarm, Data Storage (18, 000 entries), Data Retrievability, Data Retransmission, Smart Screen Mode, Button Lock				
Physical Characteristics					
Power Supply	1. 4 × 2700 mAh ER14505 Li-SOCl ₂ Replaceable Batteries 2. 5V/1A by Type-C Port				
Battery Life ^[5] (10 min interval, 25°C)	Around 3.9 Years (SF7, EU868 &US915) Around 3.1 Years (SF10, EU868) Around 2 Years (SF10, US915)	Around 1.3 Years (SF7, EU868 & US915) Around 1.2 Years (SF10, EU868) Around 1 Year (SF10, US915)			


Operating Temperature	-20°C - 60°C (E-Ink Screen: 0°C - 40°C)	
Relative Humidity	10% - 90% (non-condensing)	
Ingress Protection	IP30	
Housing&Color	ABS (UL94 HB), White	
Weight	182.5g (With Batteries)	222.6g (With Batteries)
Dimension	100.8 × 114 × 22 mm (3.97 × 4.49 × 0.87 in)	
Installation	Wall Mounting via 3M Tape or Screws	
Approvals		
Regulatory	CE, CE (RED), FCC, ISED	
Environmental	RoHS	

Note:


1. Accuracy corresponding to the temperature:

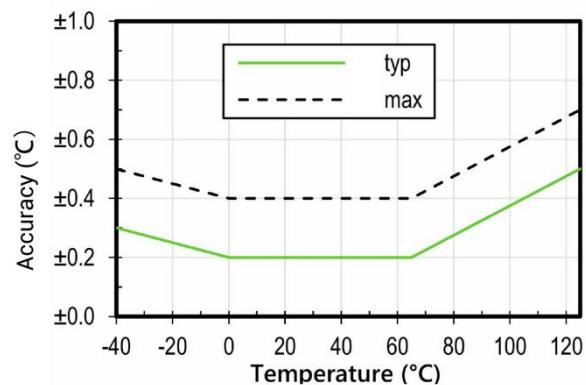

2. Accuracy corresponding to the relative humidity:

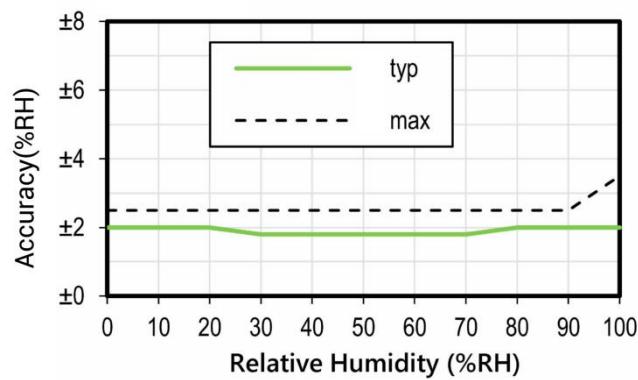

3. Typical RH accuracy corresponding to the temperature at 25°C:

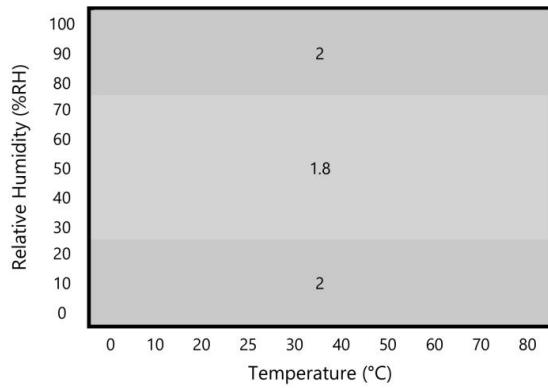


4. Reference to IAQ rating guideline (conversion from mg/m³ to ppm by the factor is about 0.5):

IAQ Rating	Air Quality
≤1.99	Very Good
2.00 to 2.99	Good
3.00 to 3.99	Medium (not recommended for exposure > 12 months)
4.00 to 4.99	Poor (not recommended for exposure > 1 months)
≥5.00	Bad (not recommended)

5. The battery life is tested under laboratory conditions and for guideline purposes only.

◆ PIR Area

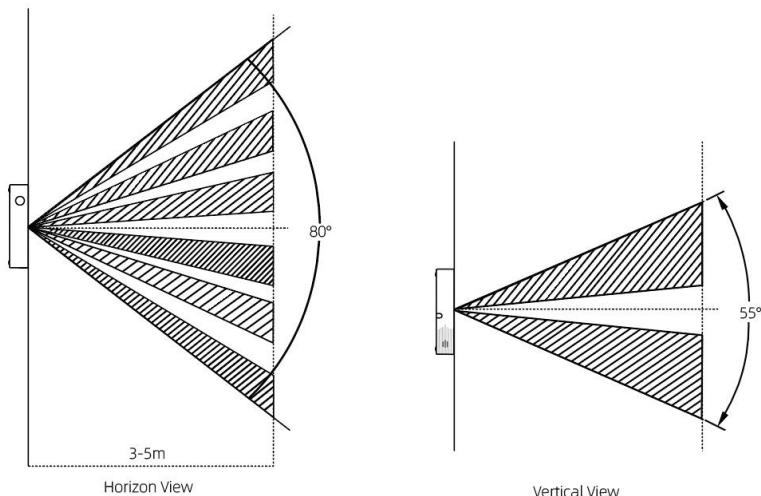

◆ Dimensions (mm)

