


Proprietary LoRa receivers

HTTP POST Receiver

RX HTTP 500-322

HTTP

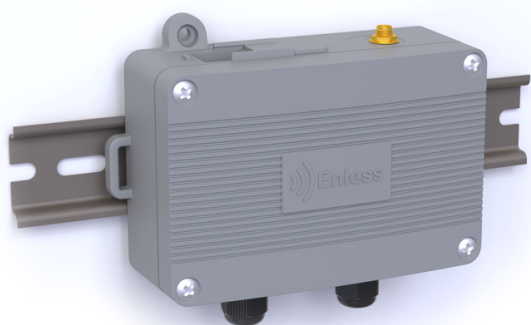

- Can handle 50 Enless sensors
- Post data to an HTTP server
- HTTP POST communication
- Power supply 7.5 - 24VDC

Technical Specifications

Physical characteristics

Protection index housing	IP60
Mounting	Wall / Clamp / DIN rail
Operating temperature	- 20 / + 55°C
Power supply	External 7.5 to 24VDC (typ. 12V 1A)

Radio

Radio antenna	Antenna not provided (SMA connector) Use of ANT REN SMA LR 1000-008 antenna recommended
Supported protocol	Enless proprietary LoRa
Frequency	868MHz

Configuration



Receiver server

Sensor pairing
RSSI level analysis
Configure HTTP parameters for data transmission

Certifications



Dimensions (mm)

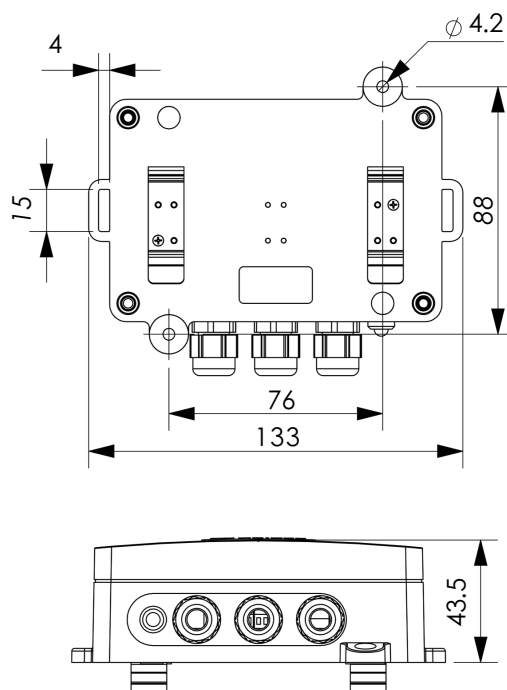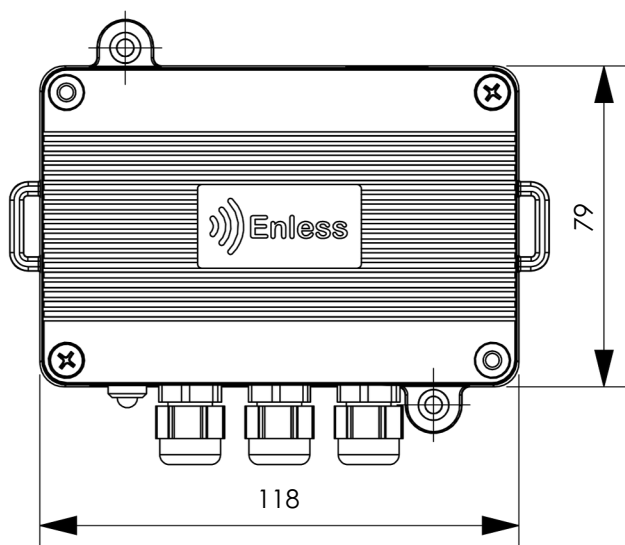

V 2.0